


WT-A3181-HS

High Pass Filter

Specifications

Serial	Parameters	
1	Pass Band Frequency	2700~18000MHz
2	Pass Band Insertion Loss	≤1.5dB
3	Pass Band VSWR	≤1.6:1
4	Stop Band Attenuation	≥40dB @ DC~2270MHz
5	Impedance	50 ohms
6	Power	≤5W
7	Connectors	SMA-Female
8	Surface Finish	Guided Oxygen or Black Paint
9	Temperature Range	-40℃~+70℃
10	Net weight	0.02 KG
11	Configuration	As Below (Size Unit: mm)

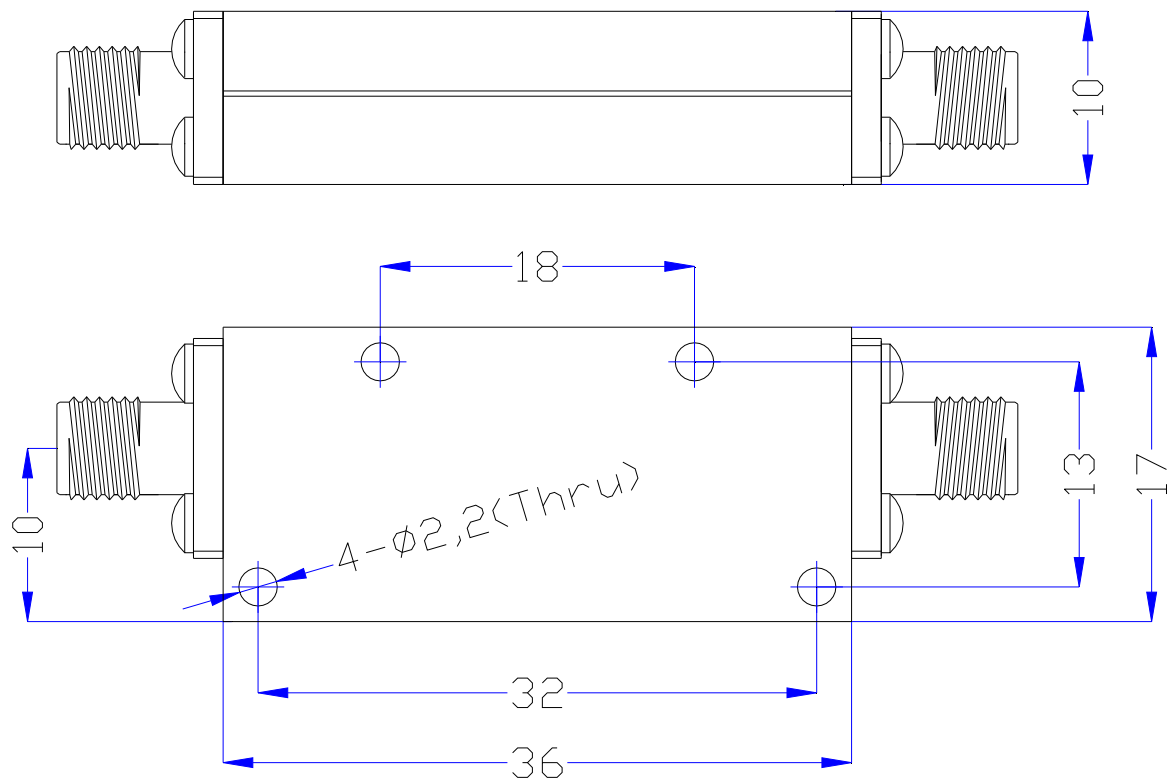

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051