


WT-A3282-HS

1.0-6.0GHz High Pass Filter

Specifications

Serial	Parameters	
1	Cut Off Frequency	1.0GHz
2	Pass Band Frequency	1.0~6.0GHz
3	Pass Band Insertion Loss	≤2.0dB @ 1.0~1.15GHz ≤1.0dB @ 1.15~6.0GHz
4	Pass Band VSWR	≤1.6:1
5	Stop Band Attenuation	≥60dB @ DC~0.86GHz
6	Impedance	50 ohms
7	Power	≤15W
8	Connectors	SMA-Female
9	Surface Finish	Guided Oxygen or Black Paint
10	Temperature Range	-55℃ ~ +85℃
11	Net weight	0.106 KG
12	Configuration	As Below (Size Unit: mm)

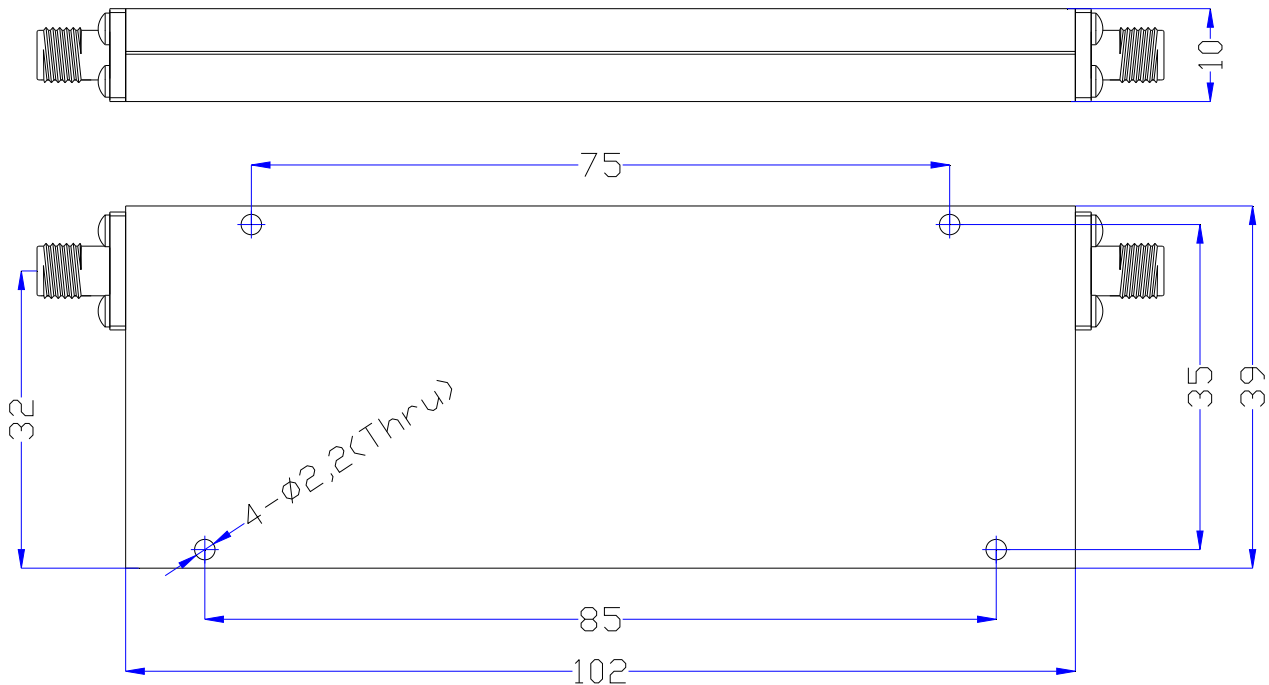

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051