


WT-A3283-HS

1.5-8.0GHz High Pass Filter

Specifications

Serial	Parameters	
1	Cut Off Frequency	1.5GHz
2	Pass Band Frequency	1.5~8.0GHz
3	Pass Band Insertion Loss	≤2.0dB @ 1.5~1.65GHz ≤1.0dB @ 1.65~8.0GHz
4	Pass Band VSWR	≤1.5:1
5	Stop Band Attenuation	≥60dB @ DC~1.28GHz
6	Impedance	50 ohms
7	Power	≤15W
8	Connectors	SMA-Female
9	Surface Finish	Guided Oxygen or Black Paint
10	Temperature Range	-55℃ ~ +85℃
11	Net weight	0.07 KG
12	Configuration	As Below (Size Unit: mm)

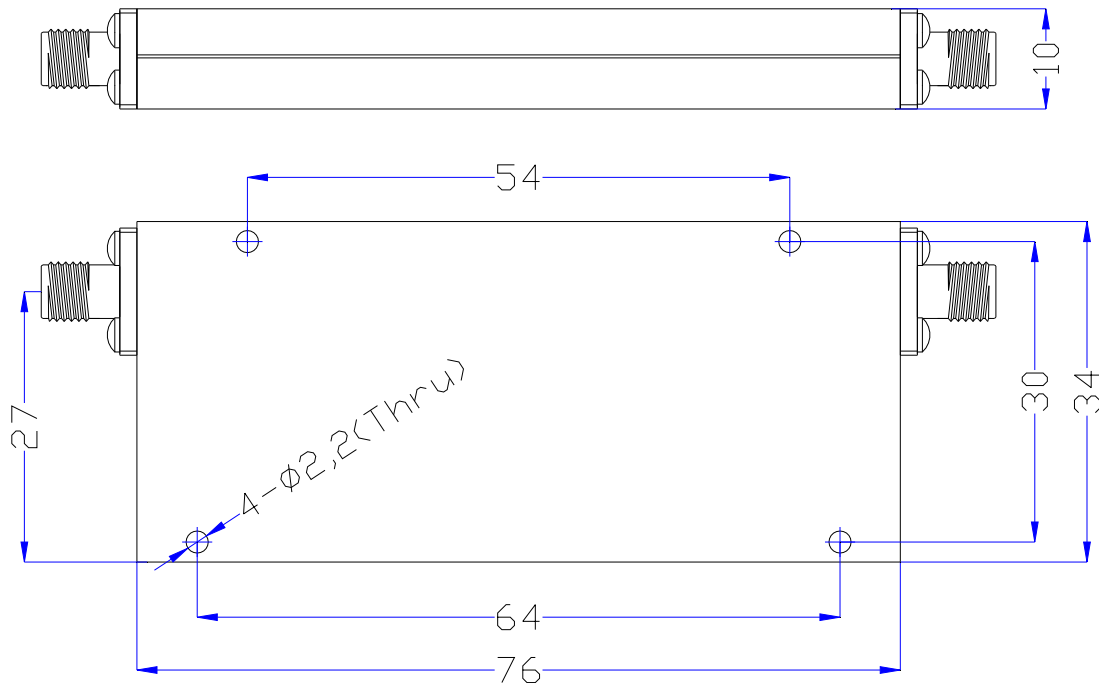

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051