


# WT-A3373-Q06

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency(F0)	462.8MHz
2	Pass Band Frequency	457.3~468.3MHz
3	Pass Band Insertion Loss	≤2.5dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ DC~440.8MHz ≥50dB @ 484.8~800MHz
6	Impedance	50 ohms
7	Surface Finish	Black Paint
8	Power Handling	≤20W
9	Connectors	N-Female
10	Operating Temperature	-20°C ~ +60°C
11	Net Weight	0.535 KG
12	Configuration	As Below (Size Unit: mm)

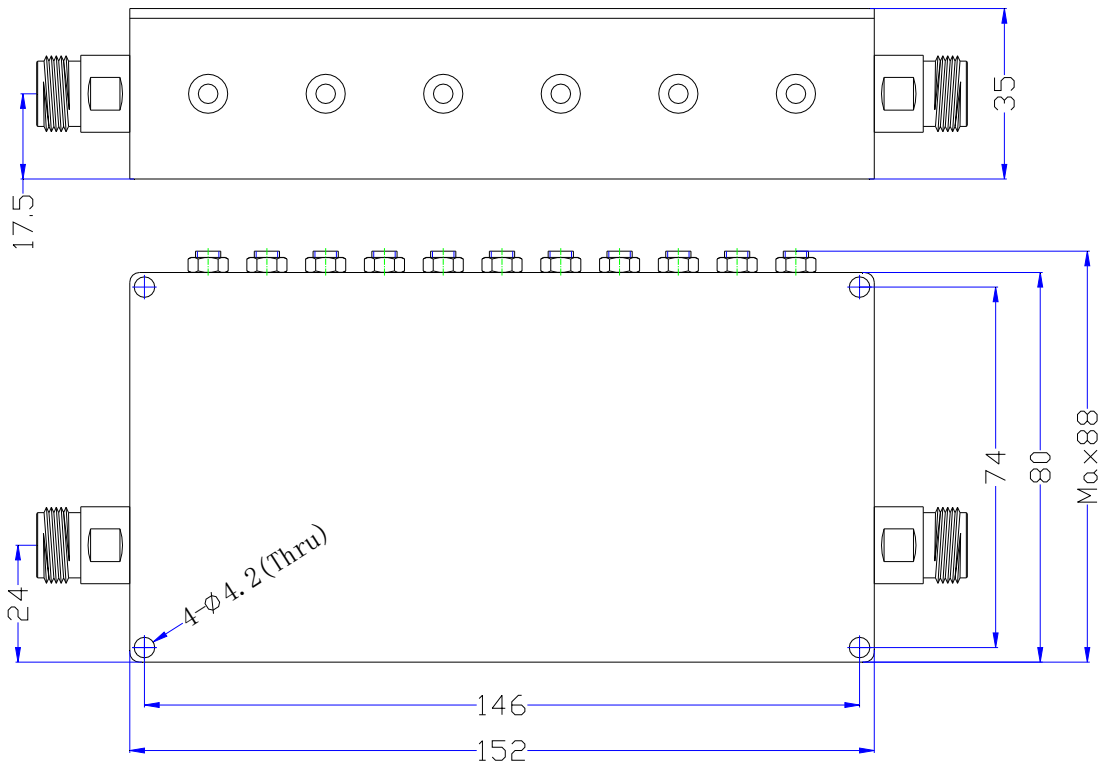

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051