


# WT-A3435-R10

## Cavity Band Rejection Filter

### Specifications

Serial	Parameters	
1	Stop Band Frequency	1710~1780MHz
2	Stop Band Attenuation	≥40dB
3	Pass Band Frequency	DC~1690MHz & 1800~4000MHz
4	Pass Band Insertion Loss	≤1.5dB @ DC~1680MHz & 1810~4000MHz ≤2.5dB @ 1680~1690MHz & 1800~1810MHz
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Power Handling	≤50W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Operating Temperature	-30℃ ~ +60℃
11	Net Weight	0.47 KG
12	Configuration	As Below (Size Unit: mm)

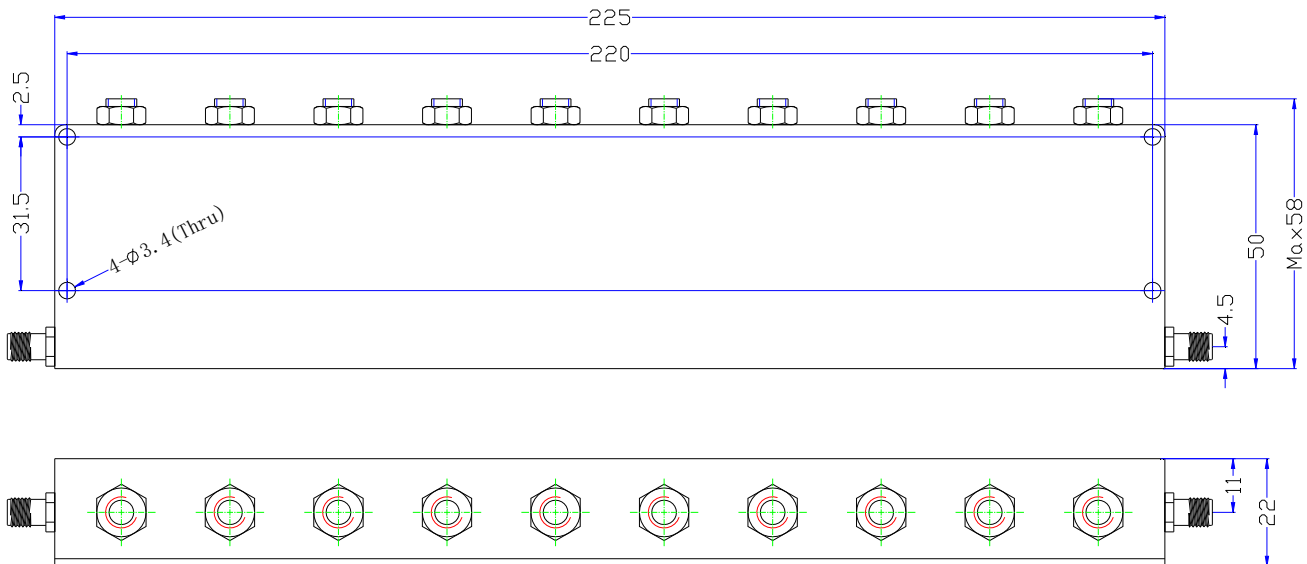

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051