


WT-A3554-Q06

腔体带通滤波器

技术指标

Serial	Parameters	
1	中心频率(Center Frequency) [F0]	595MHz
2	带宽(Bandwidth)	± 5MHz (590~600MHz)
3	插入损耗(Insertion Loss)	≤0.8dB
4	驻波比(VSWR)	≤1.2:1
5	带外抑制(Rejection)	≥50dB @ F0±30MHz (565MHz、625MHz) ≥80dB @ F0±50MHz (545MHz、645MHz) ≥90dB @ F0±100MHz (495MHz、695MHz)
6	功率(Power)	≤120W
7	阻抗(Impedance)	50 ohms
8	接口形式(Connectors)	SMA-Female
9	表面处理(Surface Finish)	黑色烤漆 (Black Paint)
10	净重(Net Weight)	0.615 KG
11	外形结构图(Configuration)	As Below (Size Unit: mm)

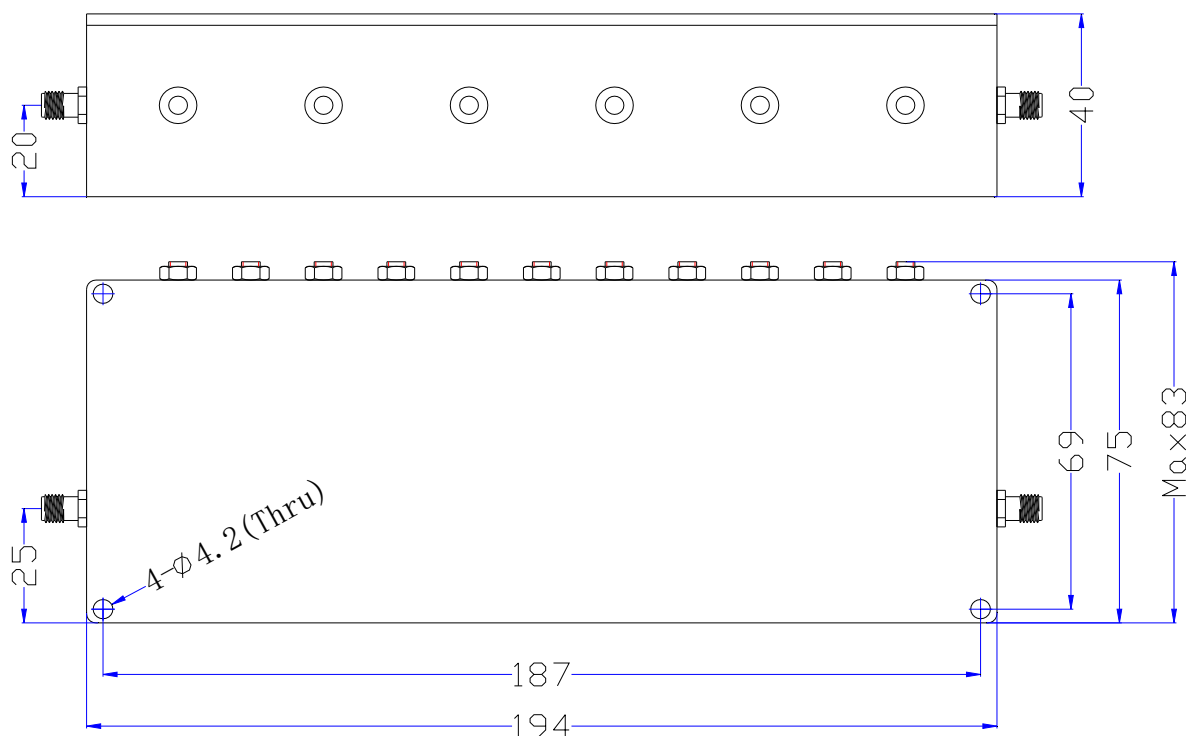

成都微通科技有限公司 WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051