


WT-A3613-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters				
1	Center Frequency (F0)	2477MHz	2467MHz	2457MHz	2447MHz
		2437MHz	2427MHz	2417MHz	2407MHz
2	Bandwidth	10MHz			
3	Pass Band Insertion Loss	$\leq 3.0\text{dB}$			
4	Pass Band VSWR	$\leq 1.3:1$			
5	Stop Band Attenuation	$\geq 40\text{dB @ } F0 \pm 15\text{MHz}$			
6	Impedance	50 ohms			
7	Surface Finish	Black Paint			
8	Power Handling	$\leq 10\text{W}$			
9	Connectors	SMA-Female			
10	Operating Temperature	$0^{\circ}\text{C} \sim +50^{\circ}\text{C}$			
11	Net Weight	0.225 KG			
12	Configuration	As Below (Size Unit: mm)			

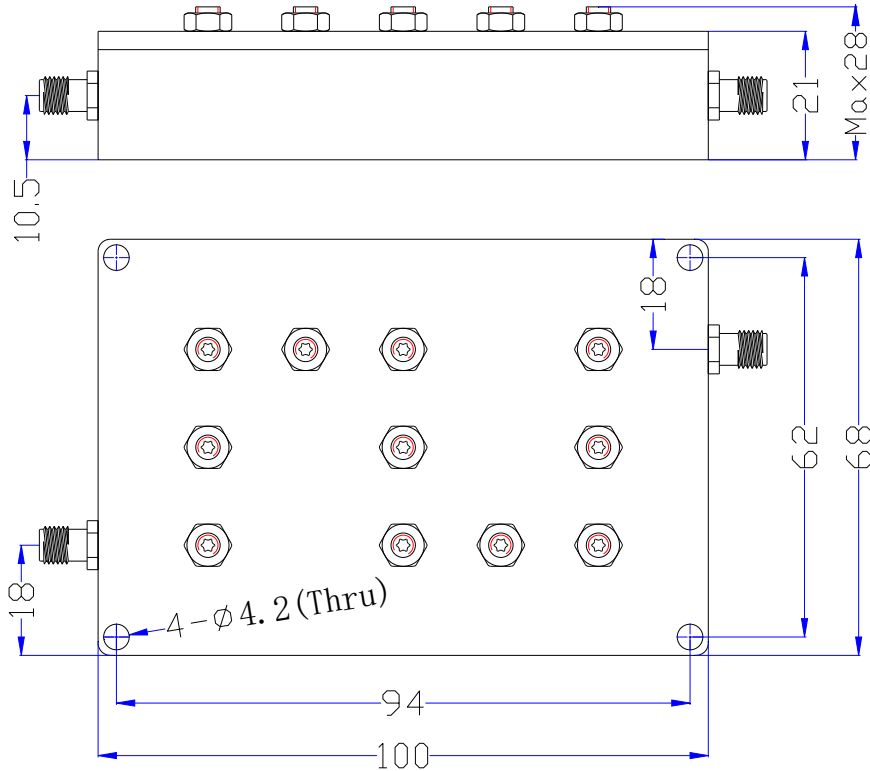

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051