


# WT-A3678-R10

## Cavity Band Rejection Filter

### Specifications

Serial	Parameters	
1	Stop Band Frequency	902~928MHz
2	Stop Band Attenuation	≥40dB
3	Pass Band Frequency	DC~892MHz & 938~2570MHz
4	Pass Band Insertion Loss	≤1.0dB @ DC~882MHz & 948~2570MHz ≤2.5dB @ 882~892MHz & 938~948MHz
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Power Handling	≤50W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Net Weight	0.9 KG
11	Configuration	As Below (Size Unit: mm)

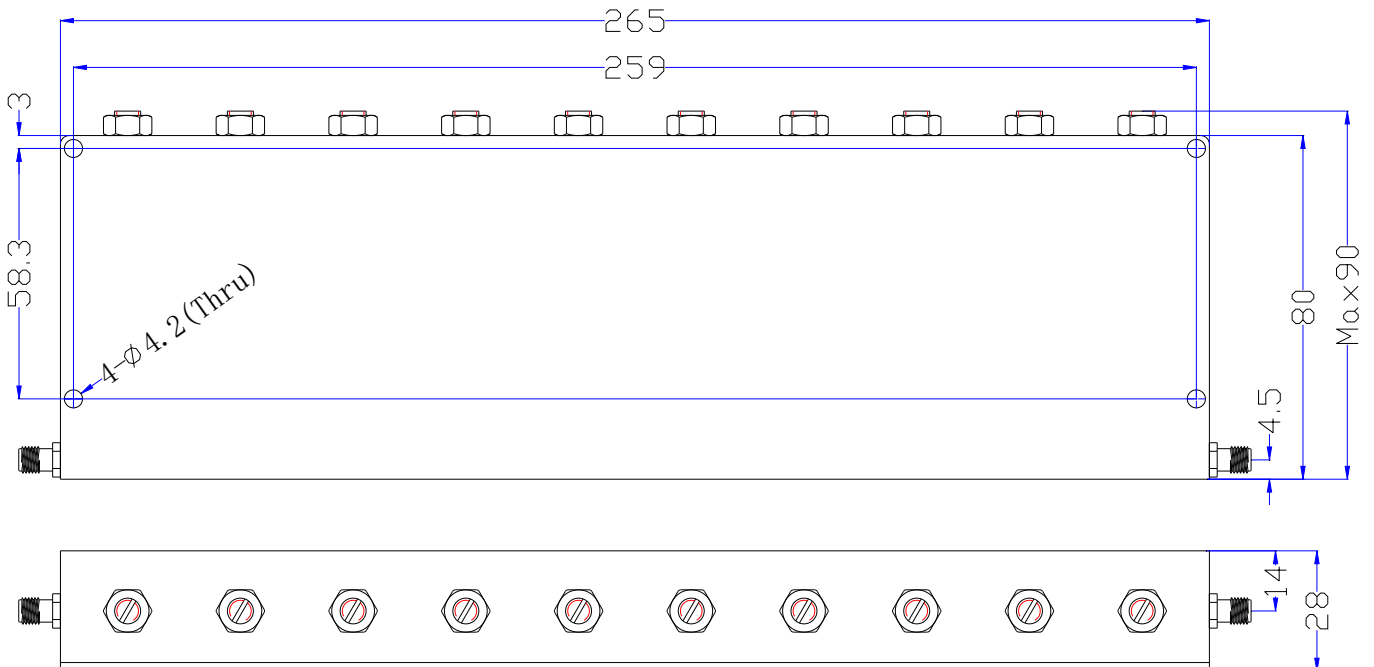

WT Microwave INC.

<http://www.wtmicrowave.com>   E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com)   [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com>   E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com)   [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037   FAX:+86-28-84300332-807

Add: Chengdu of China   Zip Code:610051