


# WT-A4505-Q08

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	942.5MHz
2	Pass Band Frequency	925~960MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥40dB @ DC~905MHz ≥40dB @ 980~2700MHz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Operating Temperature	-30°C ~+70°C
10	Surface Finish	Black Paint
11	Net Weight	0.555 KG
12	Configuration	As Below (Size Unit: mm)

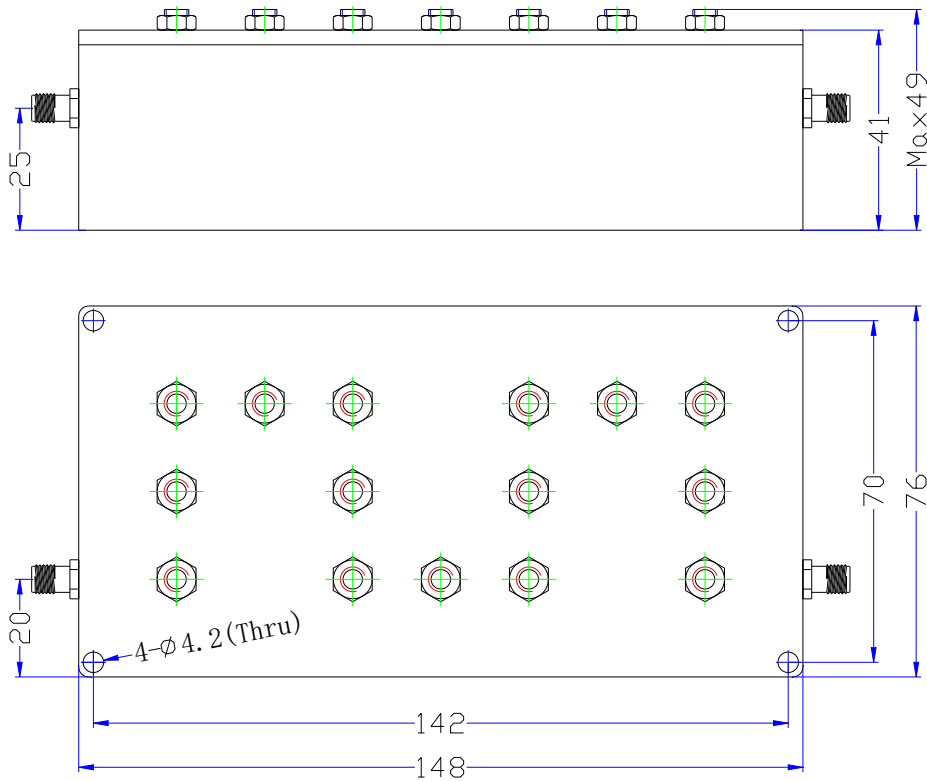

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051