


WT-A4565-Q03

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	2300MHz
2	Pass Band Bandwidth	$\pm 7.5\text{MHz}$ (2292.5~2307.5MHz)
3	Pass Band Insertion Loss	$\leq 1.0\text{dB}$
4	Pass Band VSWR	$\leq 1.3:1$
5	Stop Band Attenuation	$\geq 40\text{dB @ } F0 \pm 170\text{MHz}$ (0~2130MHz、2470~5000MHz)
6	Number of Sections	3 sections
7	Impedance	50 ohms
8	Power Handling	$\leq 10\text{W}$
9	Connectors	SMA-Female
10	Operating Temperature	$-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
11	Surface Finish	Black Paint
12	Net Weight	0.045 KG
13	Configuration	As Below (Size Unit: mm)

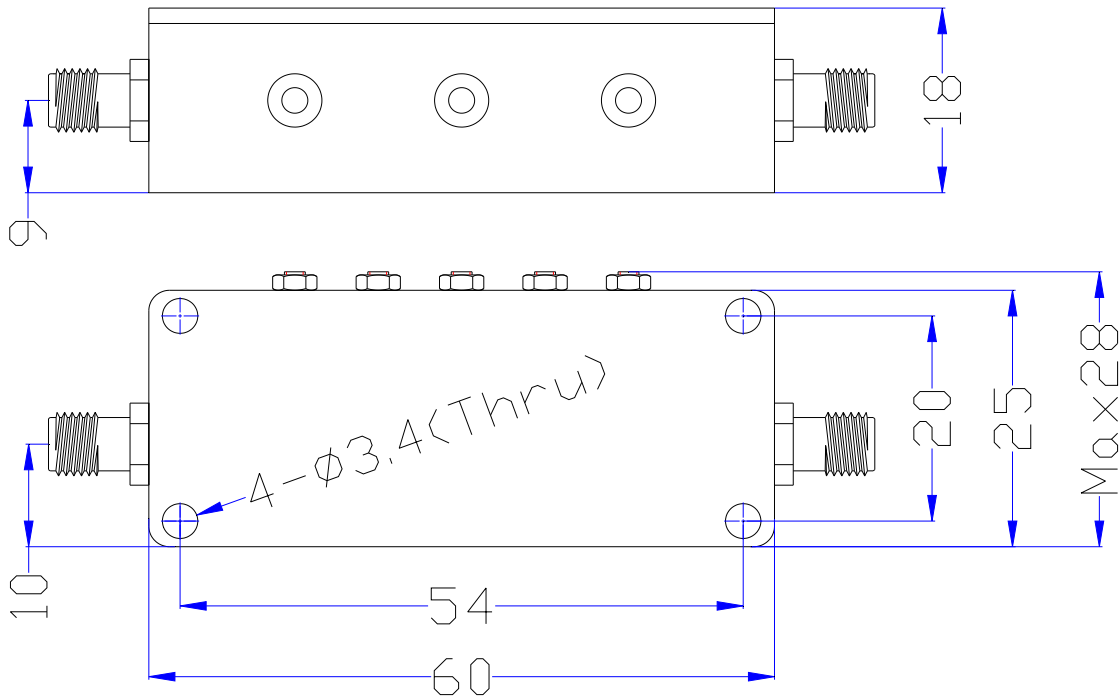

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051