


WT-A4593-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	2450MHz
2	Pass Band Frequency	2400~2500MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ DC~2250MHz ≥50dB @ 2650~3000MHz Type: ≥50dB @ 2600Mhz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	N-Female
9	Operating Temperature	-25°C ~ +65°C
10	Surface Finish	Black Paint
11	Net Weight	0.125 KG
12	Configuration	As Below (Size Unit: mm)

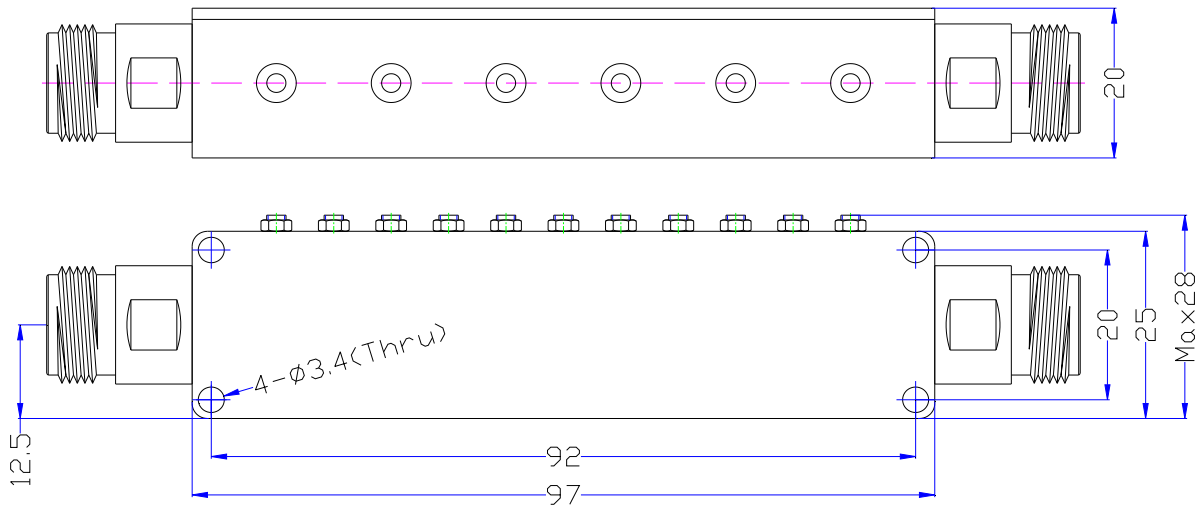

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051