


WT-A4608-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	1615MHz
2	Pass Band Bandwidth	10MHz (1610~1620MHz)
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥20dB @ F0±10MHz (1605MHz、1625MHz)
		≥30dB @ F0±20MHz (DC~1595MHz、1635~3000MHz)
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Operating Temperature	+10°C~+40°C
10	Surface Finish	Black Paint
11	Net Weight	0.355 KG
12	Configuration	As Below (Size Unit: mm)

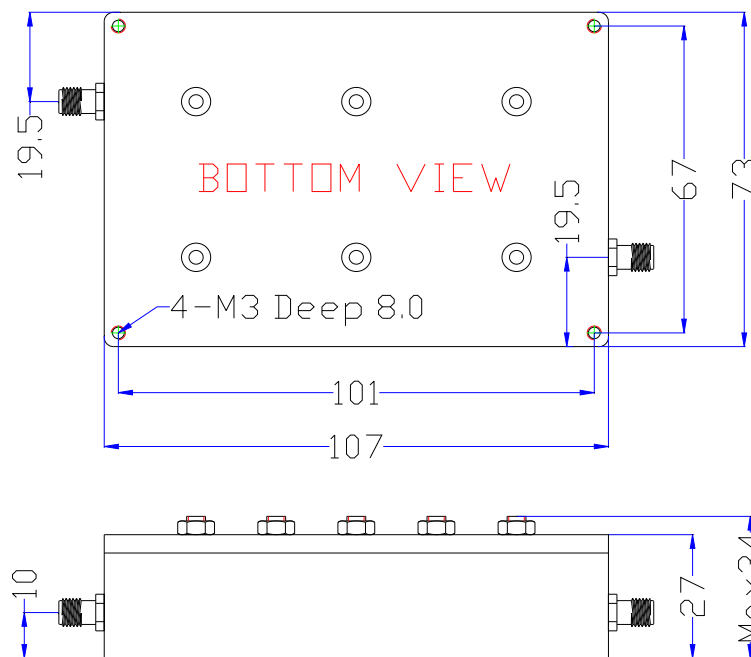

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051