


WT-A4665-Q04

Dot Frequency Cavity Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	5.0GHz
2	3.0dB Bandwidth	≤20MHz (4.99~5.01GHz)
3	Insertion Loss at F0	≤5.0dB @ 5.0GHz
4	VSWR at F0	≤1.3:1 @ 5.0GHz
5	Stop Band Rejection	≥60dB @ F0±100MHz (DC~4.9GHz、5.1~10GHz)
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	+15°C ~ +30°C
11	Net Weight	0.065 KG
12	Configuration	As Below (Size Unit: mm)

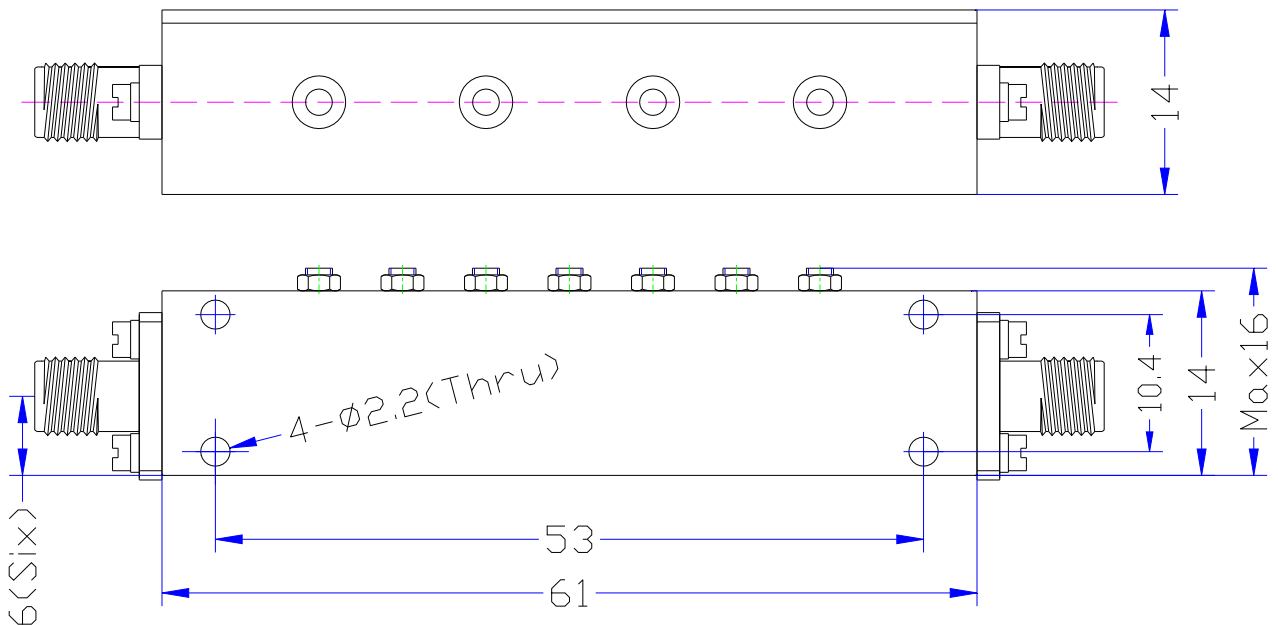

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051