


WT-A4689-Q10

Cavity Band Pass Filter

Specifications

| Serial | Parameters | |
|--------|--------------------------|--|
| 1 | Center Frequency (F0) | 1575MHz |
| 2 | Pass Band Frequency | 1500~1650MHz |
| 3 | Pass Band Insertion Loss | ≤1.5dB |
| 4 | Pass Band VSWR | ≤1.3:1 |
| 5 | Stop Band Rejection | ≥40dB @ DC~1450MHz ≥40dB @ 1700~4000MHz |
| 6 | Impedance | 50 ohms |
| 7 | Power Handling | ≤5W |
| 8 | Connectors | SMA-Female (Flange Structure) [Material: Stainless Steel] |
| 9 | Temperature Range | -30℃~+70℃ |
| 10 | Surface Finish | Black Paint |
| 11 | Net Weight | 0.185 KG |
| 12 | Configuration | As Below (Size Unit: mm) |

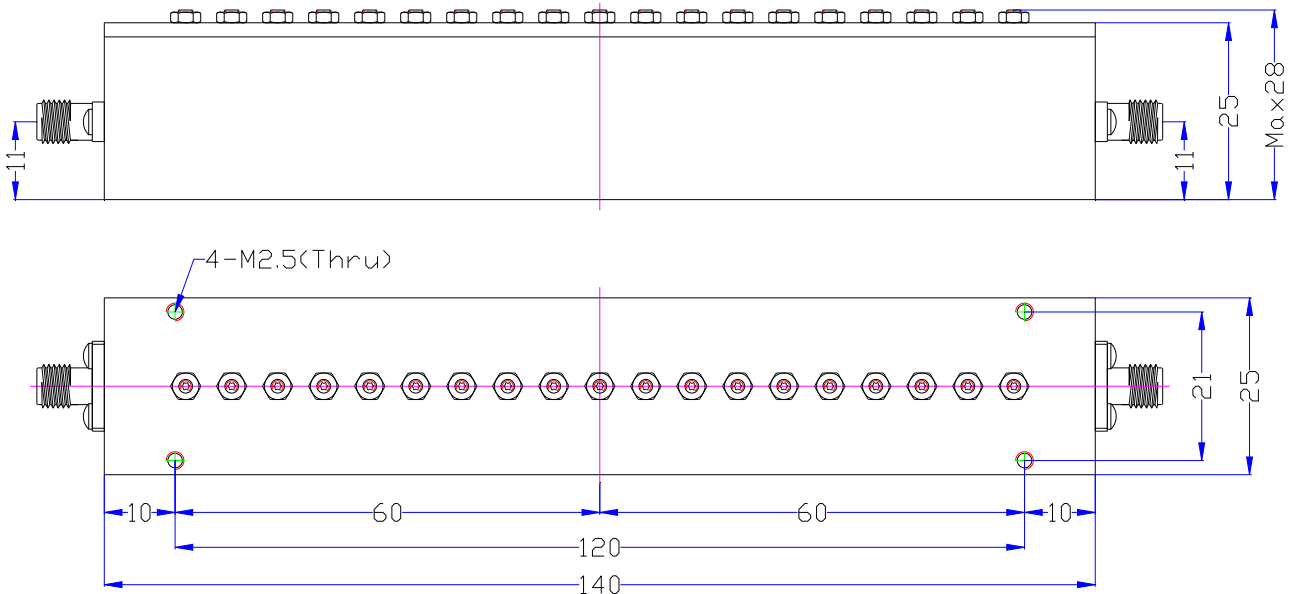

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051