


WT-A4728-R10

Cavity Band Rejection Filter

Specifications

Serial	Parameters	
1	Stop Band Frequency	2110~2130MHz
2	Stop Band Rejection	≥40dB
3	Pass Band Frequency	DC~2060MHz & 2180~5000MHz
4	Pass Band Insertion Loss	≤1.0dB
5	Pass Band VSWR	≤1.5:1
6	Impedance	50 ohms
7	Power Handling	≤30W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-20℃~+60℃
11	Net Weight	0.385 KG
12	Configuration	As Below (Size Unit: mm)

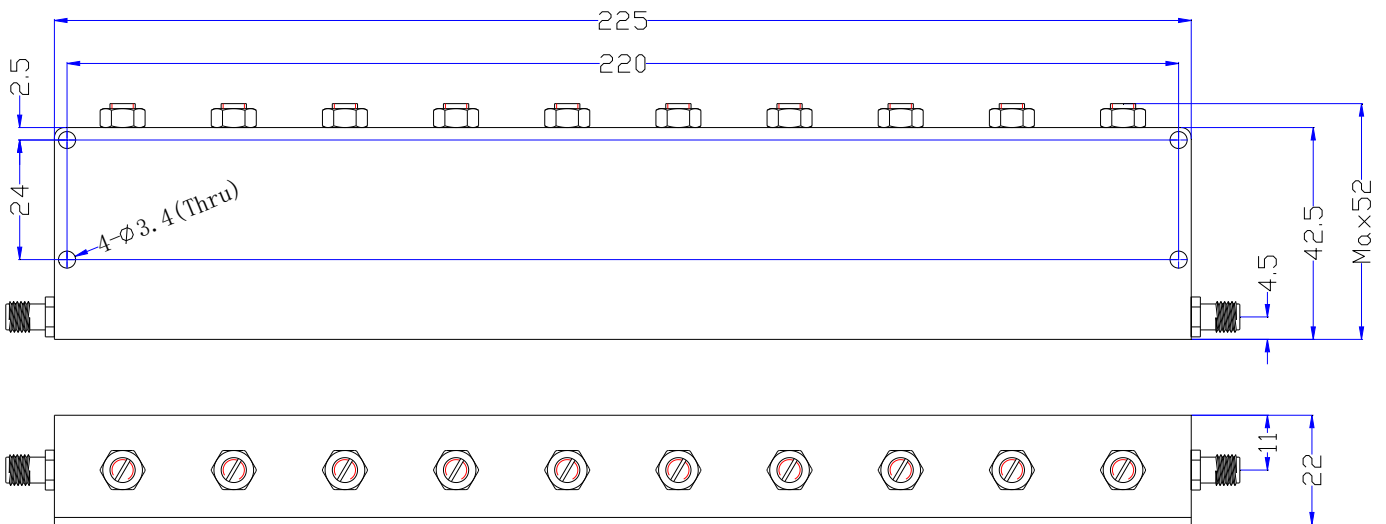

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051