


# WT-A4748-Q06

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	2535MHz
2	Pass Band Frequency	2510~2560MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥50dB @ 2655MHz
6	Impedance	50 ohms
7	Power Handling	30W
8	Connectors	SMA-Female
9	Operating Temperature	-20°C ~ +60°C
10	Surface Finish	Black Paint
11	Net Weight	0.175 KG
12	Configuration	As Below (Size Unit: mm)

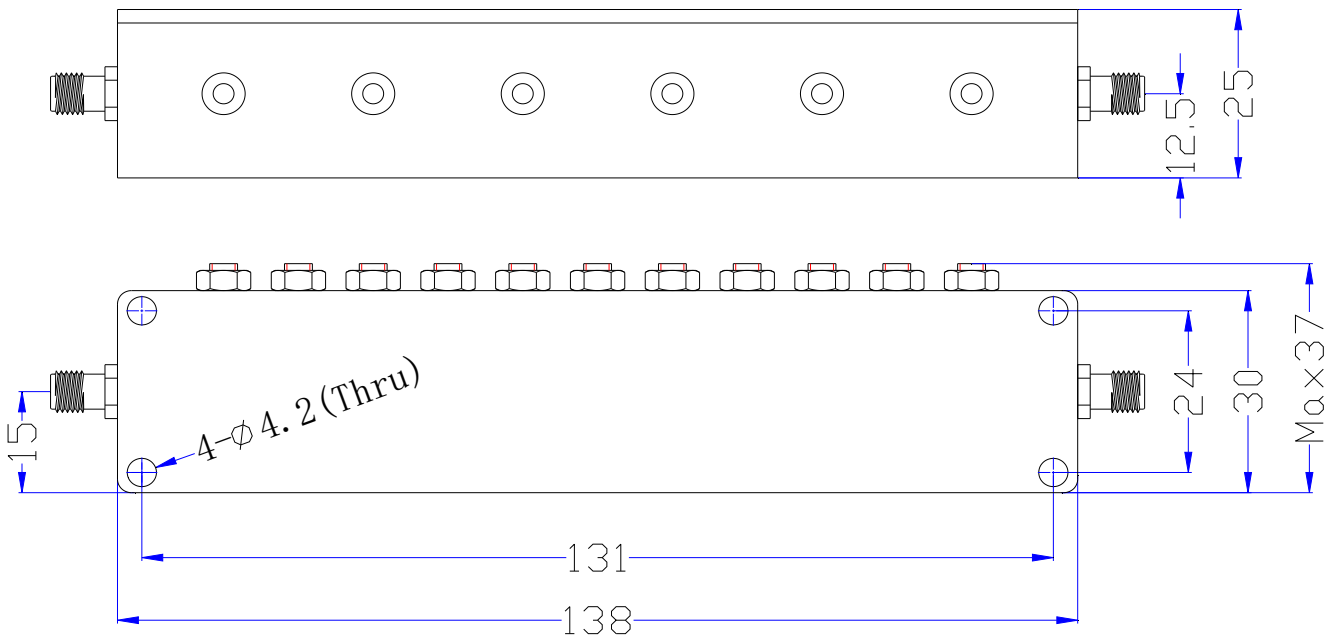

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051