


# WT-A4809-Q03

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	1640MHz
2	3.0dB Bandwidth	8.0MHz Max. (1636~1644MHz)
3	Insertion Loss at F0	≤1.5dB @ 1640MHz
4	Pass Band VSWR	≤1.3:1 @ 3.0MHz Bandwidth (1638.5~1641.5MHz)
5	Stop Band Attenuation	≥40dB @ F0±40MHz (DC~1600MHz、1680~3000MHz)
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	+10℃~+40℃
11	Net Weight	0.185 KG
12	Configuration	As Below (Size Unit: mm)

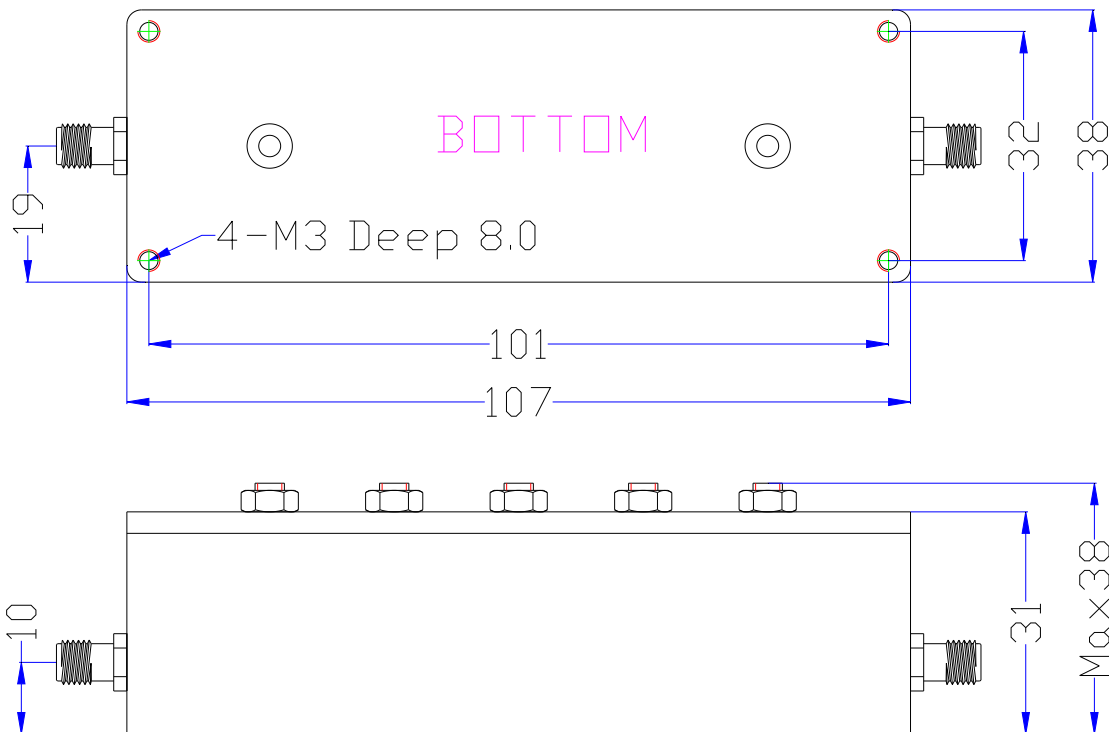

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051