


# WT-A4871-Q08

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	2412MHz
2	Pass Band Frequency	2402~2422MHz
3	Pass Band Insertion Loss	≤2.5dB
4	Pass Band VSWR	≤1.4:1
5	Stop Band Rejection	≥30dB @ DC~2398MHz ≥30dB @ 2426~5000MHz
6	Impedance	50 ohms
7	Power Handling	≤20W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	0°C~+40°C
11	Net Weight	0.58 KG
12	Configuration	As Below (Size Unit: mm)

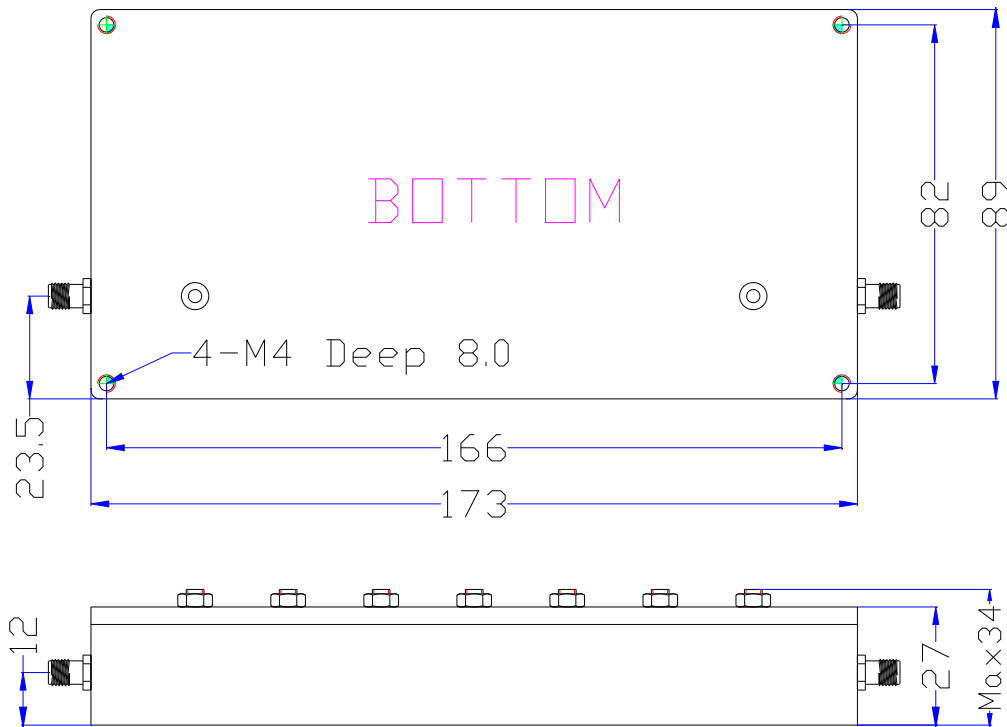

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051