


WT-A4930-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	902.5MHz
2	Pass Band Frequency	890~915MHz
3	Pass Band Insertion Loss	≤2.0dB
4	Pass Band Ripple	≤1.0dB
5	Pass Band VSWR	≤1.3:1
6	Stop Band Attenuation	≥15dB @ 885MHz ≥15dB @ 920MHz ≥35dB @ DC~880MHz ≥35dB @ 925~2000MHz
7	Impedance	50 ohms
8	Power Handling	≤20W
9	Connectors	N-Male / N-Female
10	Surface Finish	Black Paint
11	Temperature Range	-10℃ ~ +50℃
12	Net Weight	0.42 KG
13	Configuration	As Below (Size Unit: mm)

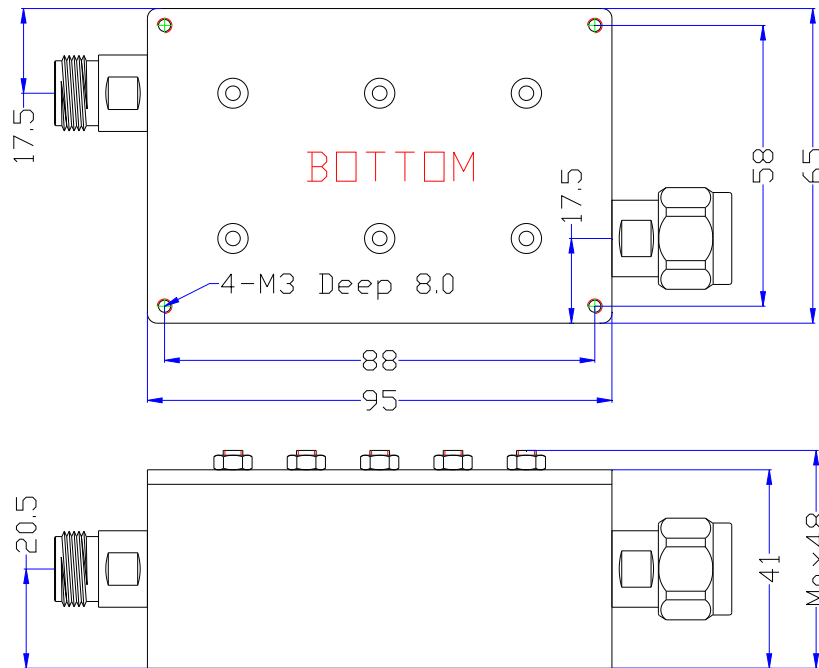

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL: +86-28-84300332/84300037 FAX: +86-28-84300332-807

Add: Chengdu of China Zip Code: 610051