


WT-A4943-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	1950MHz
2	Pass Band Bandwidth	100MHz (1900~2000MHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥60dB @ F0±190MHz (DC~1760MHz、2140~5000MHz)
6	Impedance	50 ohms
7	Power Handling	≤100W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃ ~ +70℃
11	Net Weight	0.21 KG
12	Configuration	As Below (Size Unit: mm)

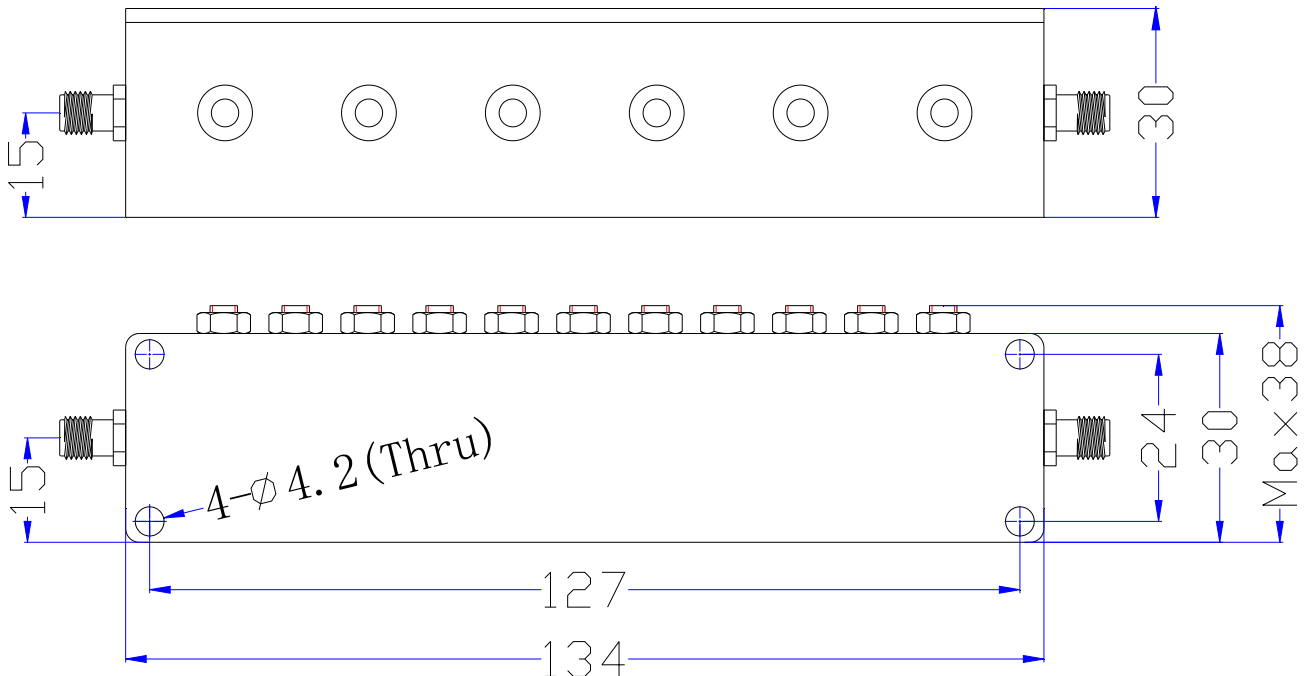

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051