


WT-A4944-Q06

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	2535MHz
2	Pass Band Bandwidth	100MHz (2485~2585MHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥60dB @ F0±190MHz (DC~2345MHz、2725~5000MHz)
6	Impedance	50 ohms
7	Power Handling	≤100W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30℃ ~ +70℃
11	Net Weight	0.20 KG
12	Configuration	As Below (Size Unit: mm)

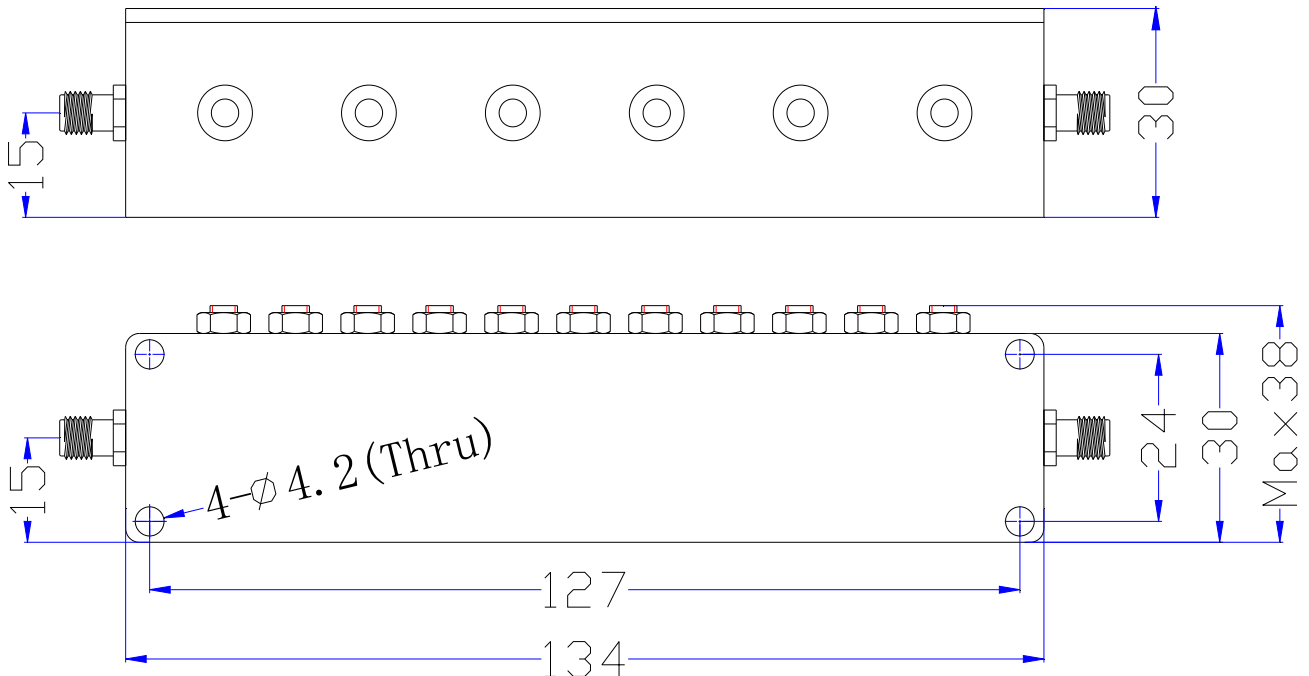

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051