


WT-A4978-Q08

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	3.6GHz
2	Pass Band Frequency	3.4~3.8GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Rejection	≥40dB @ F0±400MHz (DC~3.2GHz、4.0~7.0GHz)
6	Impedance	50 ohms
7	Power Handling	≤20W CW
8	Connectors	N-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30°C ~ +70°C
11	Net Weight	0.145 KG
12	Configuration	As Below (Size Unit: mm)

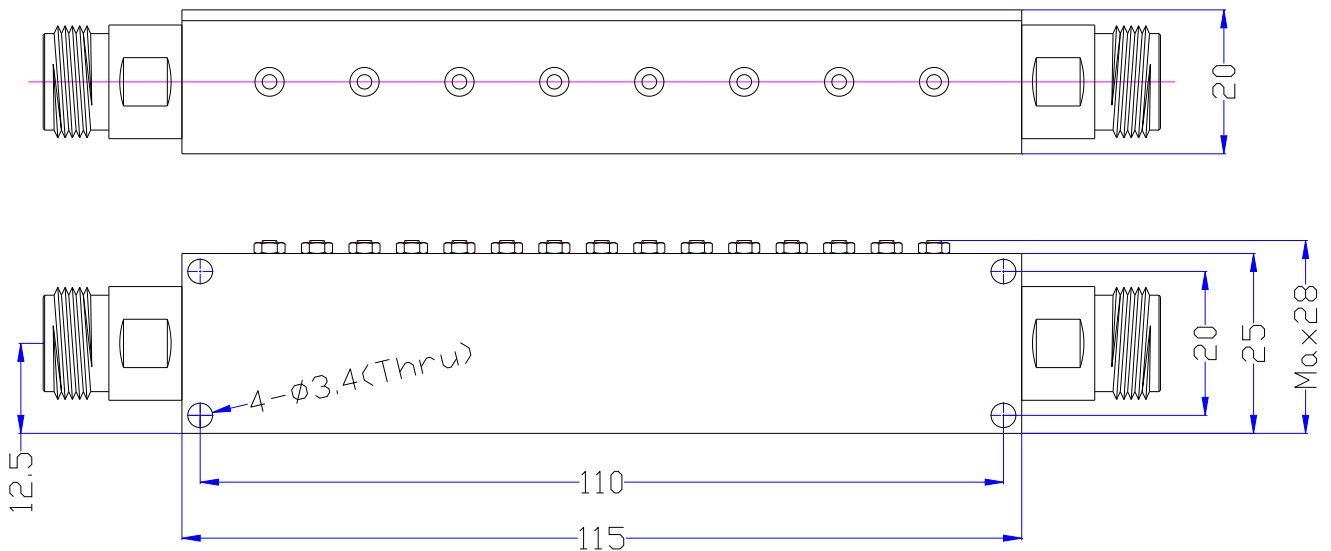

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051