


## WT-A5004-Q09

### Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	28GHz
2	1dB Pass Band Bandwidth	0.4GHz (27.8~28.2GHz)
3	Pass Band Insertion Loss	≤4.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Rejection	≥30dB @ Fc±200MHz (DC~27.6GHz、28.4~35GHz)
6	Impedance	50 ohms
7	Power Handling	≤5W
8	Connectors	2.92mm(K)-Female
9	Surface Finish	Black Paint
10	Temperature Range	-10℃~+50℃
11	Net Weight	0.054 KG
12	Configuration	As Below (Size Unit: mm)

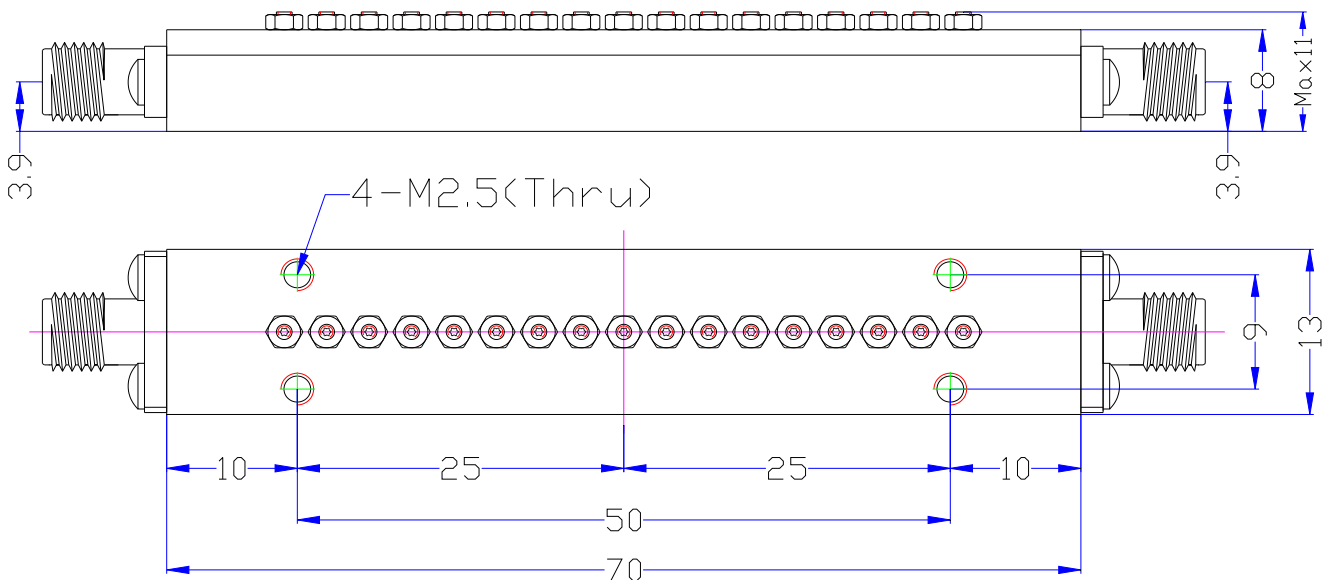

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051