


# WT-A5015-R12

## Cavity Band Rejection Filter

### Specifications

Serial	Parameters	
1	Stop Band Frequency	3300~3800MHz
2	Stop Band Rejection	≥45dB
3	Pass Band Frequency	0~3180MHz & 3920~8000MHz
4	Pass Band Insertion Loss	≤2.5dB
5	Pass Band VSWR	≤1.7:1
6	Impedance	50 ohms
7	Power Handling	≤10W CW
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-20°C ~+60°C
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

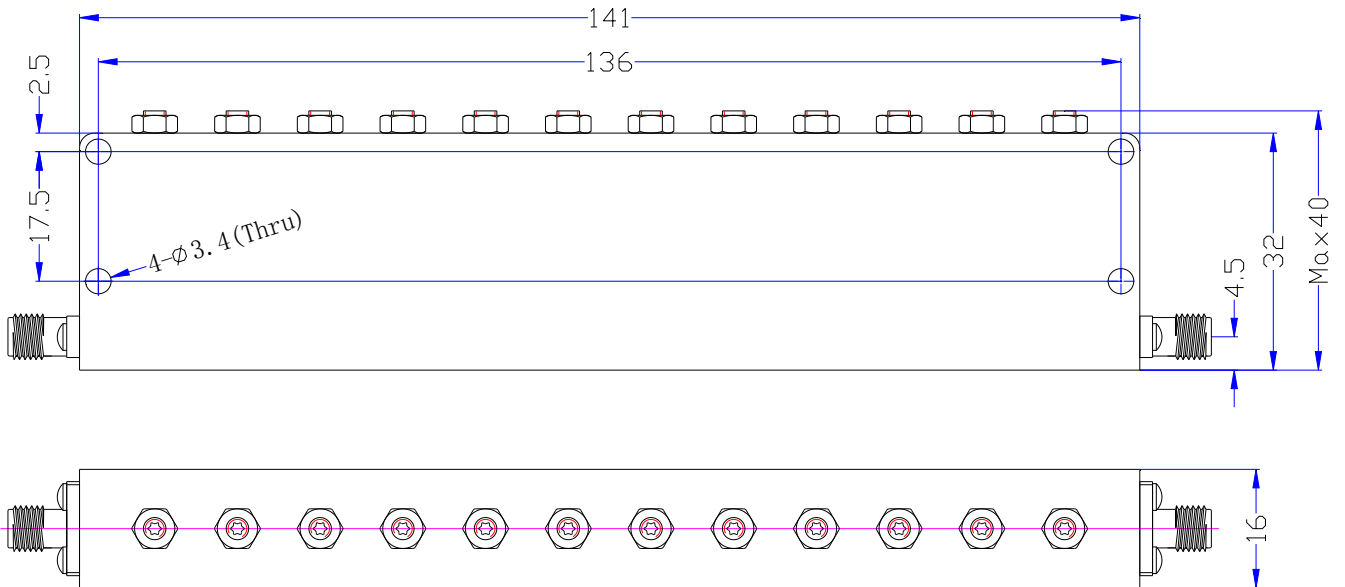

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: [tech@wtmicrowave.com](mailto:tech@wtmicrowave.com) [sales@wtmicrowave.com](mailto:sales@wtmicrowave.com)

<http://www.cdweitong.com> E-mail: [tech@cdweitong.com](mailto:tech@cdweitong.com) [sales@cdweitong.com](mailto:sales@cdweitong.com)

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051