


WT-B0001-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	Frequency Range	880~915MHz	925~960MHz
2	1dB Bandwidth	35MHz(Min)	35MHz(Min)
3	Insertion Loss	≤1.0dB	≤1.0dB
4	Return Loss	≥18dB	≥18dB
5	Isolation	≥60dB	
6	Power	50W	
7	Operating Temperature	-20℃~+70℃	
8	Storage Temperature	-40℃~+85℃	
9	Surface Finish	Black Paint	
10	Port Connectors	SMA-Female	
11	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
12	Configuration	As Below	

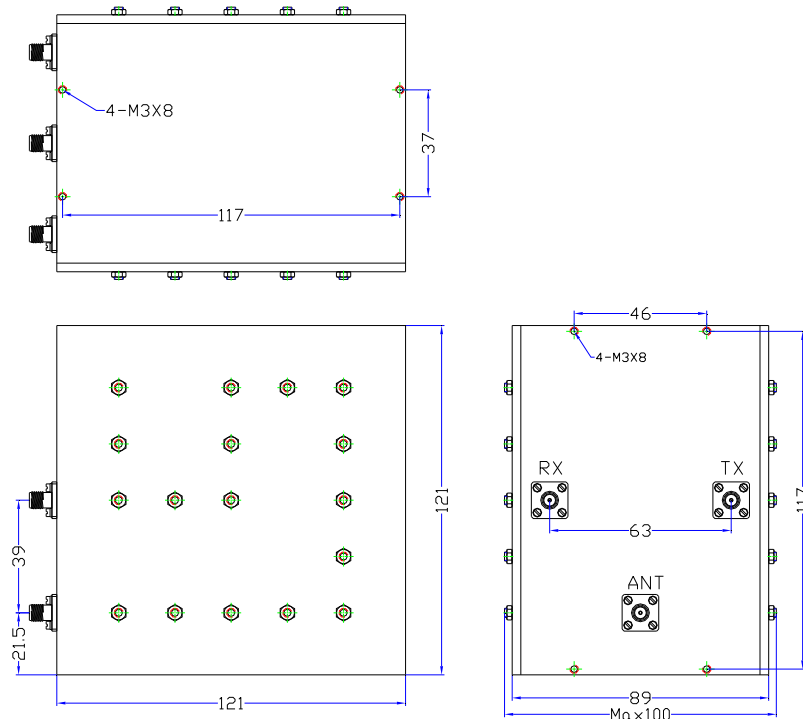

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051