


WT-B0013-02

Cavity Diplexer

Specifications

Serial	Parameters	RX	TX
1	Frequency Range	880~915MHz	925~960MHz
2	Insertion Loss	≤1.0dB	≤1.0dB
3	Ripple	≤0.8dB	≤0.8dB
4	Return Loss	≥18dB	≥18dB
5	Rejection	≥60dB@925~960MHz	≥60dB@880~915MHz
6	Input Power	50W CW	
7	Operating Temperature	-40℃~+70℃	
8	Surface Finish	Black Paint	
9	Connectors	N-Female	
10	RoHS	Yes	
11	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
12	Net Weight	1.085 KG	
13	Configuration	As Below	

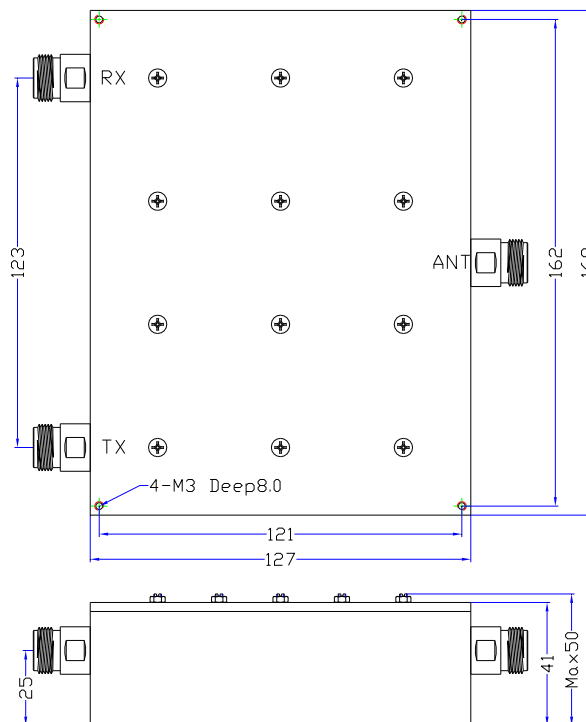

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051