


WT-B0027-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	Frequency Range	758~768MHz	788~798MHz
2	Insertion Loss	≤1.0dB	≤1.0dB
3	Ripple	≤0.5dB	≤0.5dB
4	VSWR	≤1.3	≤1.3
5	Rejection	≥65dB@788~798MHz	≥65dB@758~768MHz
6	Input Power	50W CW	
7	Operating Temperature	-40℃~+70℃	
8	Surface Finish	Black Paint	
9	Connectors	N-Female	
10	RoHS	Yes	
11	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
13	Configuration	As Below	

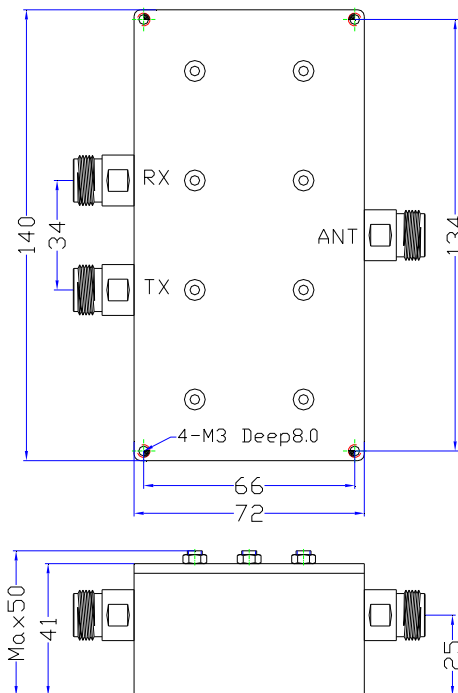

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com
 TEL:+86-028-84300332 FAX:+86-028-84300332
 地址:中国 成都市建设路 43 号 610051
 Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051
 第4页 共4页