


WT-B0033-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	Frequency Range	1920~1980MHz	2110~2170MHz
2	Insertion Loss	≤0.8dB	≤0.8dB
3	Passband Ripple	≤0.4dB	≤0.4dB
4	VSWR	≤1.3	≤1.3
5	Rejection	≥80dB@2110~2170MHz	≥80dB@1920~1980MHz
6	Power Handling	100W Avg Max	
7	Operating Temperature	-20°C to +40°C	
8	Surface Finish	Black Paint	
9	Port Connectors	N-Female	
10	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
11	Net Weight	0.43 KG	
12	Configuration	As Below	

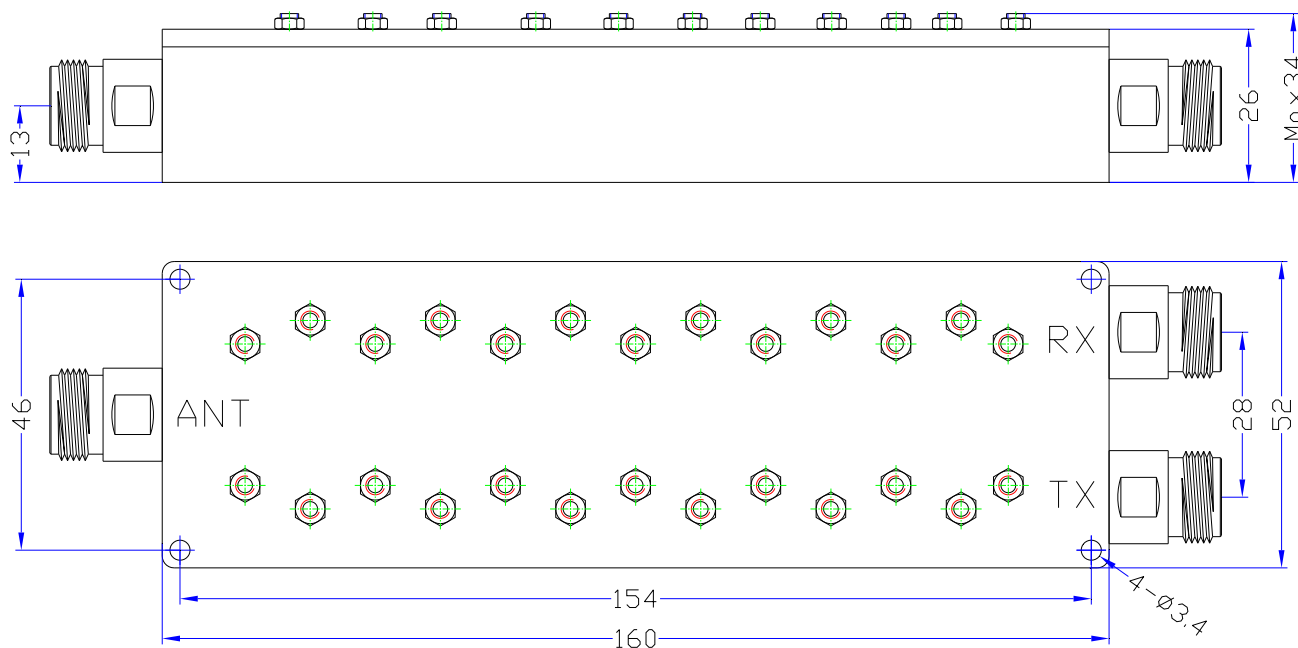

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051

第4页 共4页