


WT-B0071-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	频率范围(Frequency Range)	403~409MHz	413~419MHz
2	插入损耗(Insertion Loss)	$\leq 2.0\text{dB}$	$\leq 2.0\text{dB}$
3	回波损耗(Return Loss)	$\geq 18\text{dB}$	$\geq 18\text{dB}$
4	带外抑制(Rejection)	$\geq 80\text{dB}@413\sim 419\text{MHz}$	$\geq 80\text{dB}@403\sim 409\text{MHz}$
5	表面处理(Surface Finish)	黑色烤漆(Black Paint)	
6	接口形式(Connectors)	SMA-Female	
7	端口标识(Port Sign)	Port1:ANT ; Port2:RX ; Port3:TX	
8	外形结构图(Configuration)	As Below	

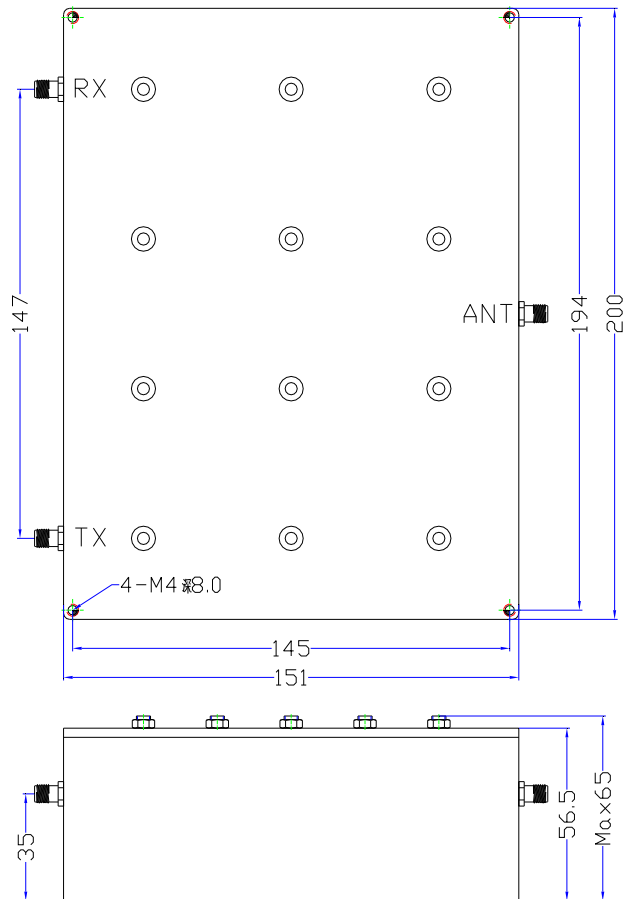

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041