


WT-B0078-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	中心频率(Center Frequency)	411.25MHz	421.25MHz
2	带宽(Bandwidth)	3MHz (409.75~412.75MHz)	3MHz (419.75~422.75MHz)
3	插入损耗(Insertion Loss)	$\leq 2.0\text{dB}$	$\leq 2.0\text{dB}$
4	回波损耗(Return Loss)	$\geq 18\text{dB}$	$\geq 18\text{dB}$
5	带外抑制(Rejection)	$\geq 80\text{dB}@419.75\sim 422.75\text{MHz}$	$\geq 80\text{dB}@409.75\sim 412.75\text{MHz}$
6	表面处理(Surface Finish)	黑色烤漆(Black Paint)	
7	接口形式(Connectors)	SMA-Female	
8	端口标识(Port Sign)	Port1:ANT ; Port2:RX ; Port3:TX	
9	外形结构图(Configuration)	As Below	

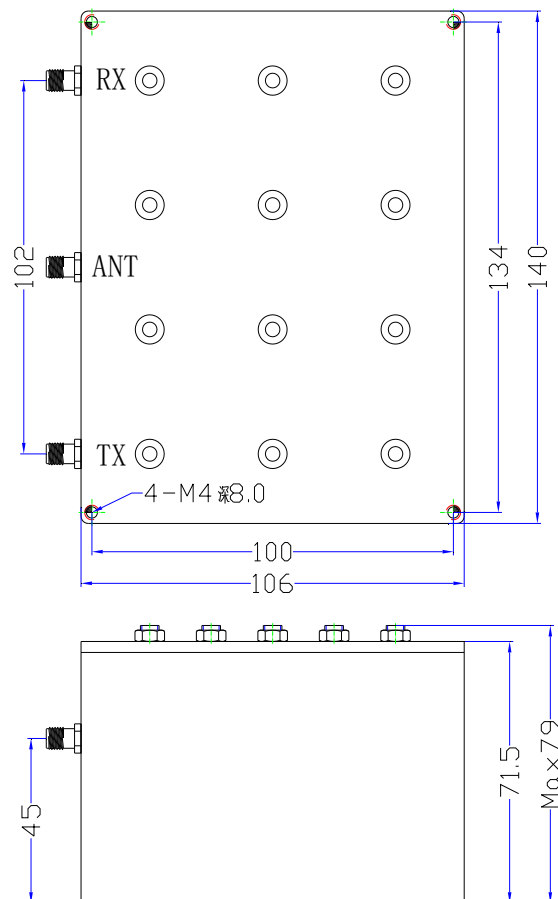

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041