


## WT-B0081-02

### 腔体双工器

### 技术指标

Serial	Parameters	RX	TX
1	Frequency Range	7500~7700MHz	7900~8100MHz
2	Insertion Loss	≤1.6dB	≤1.6dB
3	Return Loss	≥20dB	≥20dB
4	Rejection	≥70dB@7900MHz	≥70dB@7700MHz
5	Surface Finish	The Original Silver Colour	
6	Port Connectors	SMA-Female	
7	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
8	Configuration	As Below	

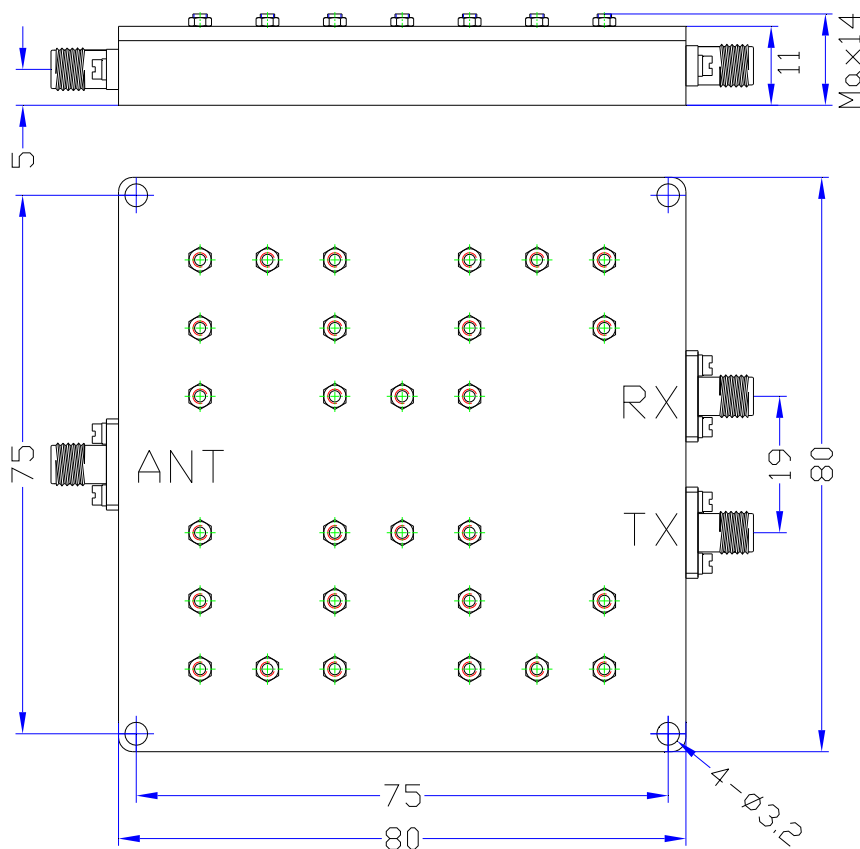

### 成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd  
<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com  
 TEL:+86-028-84300332 FAX:+86-028-84300332  
 地址:中国 成都市高新区桂溪路 223 号 610041  
 Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041  
 第4页 共4页