


WT-B0128-02

腔体双工器

技术指标

Serial	Parameters	RX	TX
1	Frequency Range	751~756MHz	791~796MHz
2	Insertion Loss	≤1.2dB	≤1.2dB
3	Ripple	≤0.5dB	≤0.5dB
4	VSWR	≤1.2:1	≤1.2:1
5	Rejection	≥70dB @ 791~796MHz	≥70dB @ 751~756MHz
6	Average Power	10W	
7	Operating Temperature	-40°C~+80°C	
8	Surface Finish	Black Paint	
9	Port Connectors	SMA-Female	
10	Configuration	As Below (Size Unit: mm)	

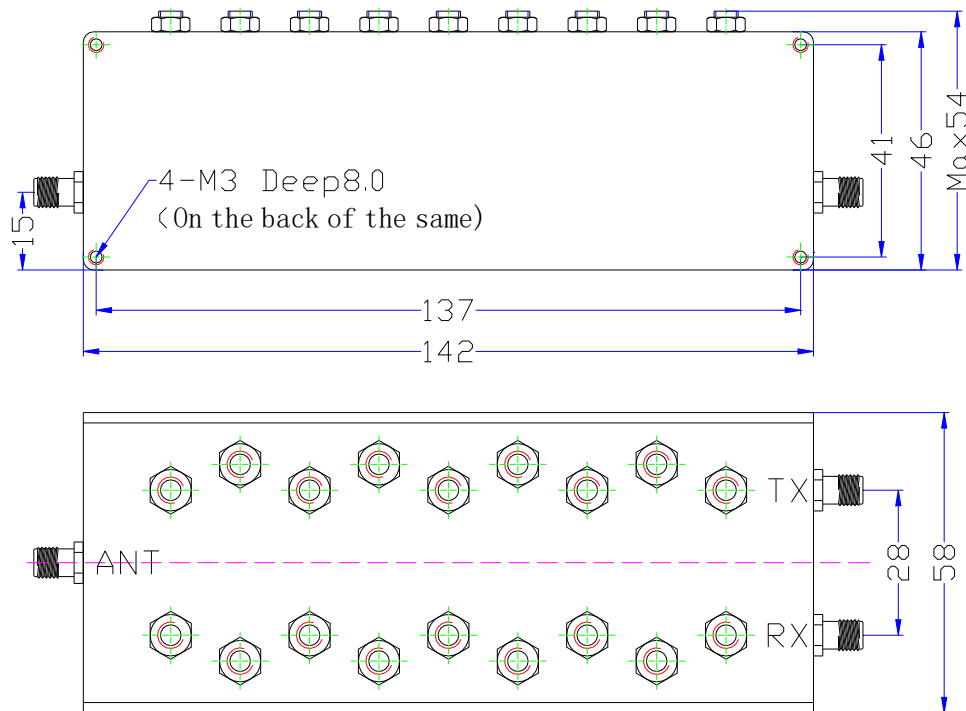

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 223 号 610041

Add:No.223,Guixi Road,Chengdu 610041,China Zip Code:610041