
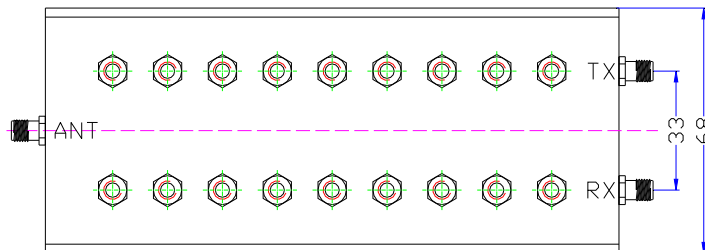


# WT-B0137-02

## 腔体双工器

### 技术指标

Serial	Parameters	RX	TX
1	中心频率(Frequency Range)	340MHz	380MHz
2	带宽(Bandwidth)	$\pm 4\text{MHz}$ (336~344MHz)	$\pm 4\text{MHz}$ (376~384MHz)
3	插入损耗(Insertion Loss)	$\leq 1.0\text{dB}$	$\leq 1.0\text{dB}$
4	回波损耗(Return Loss)	$\geq 20\text{dB}$	$\geq 20\text{dB}$
5	带外抑制(Rejection)	$\geq 60\text{dB}$ @ 376~384MHz	$\geq 60\text{dB}$ @ 336~344MHz
6	表面处理(Surface Finish)	黑色烤漆(Black Paint)	
7	接口形式(Connectors)	SMA-Female	
8	端口标识(Port Sign)	Port1:ANT ; Port2:RX ; Port3:TX	
9	外形结构图(Configuration)	As Below (Size Unit: mm)	

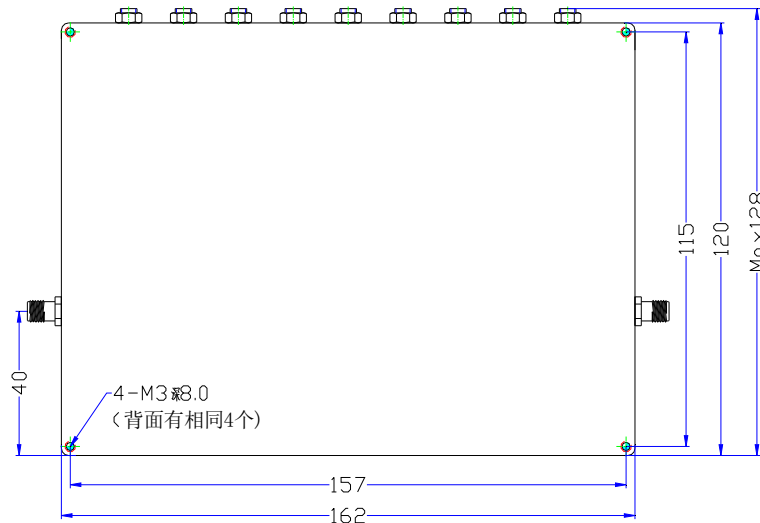

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市高新区桂溪路 210 号 610041

Add:No.210,Guixi Road,Chengdu 610041,China Zip Code:610041