
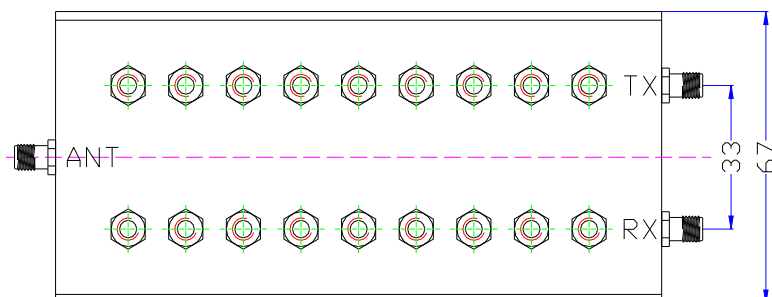


# WT-B0231-02

## 腔体双工器

### 技术指标

Serial	Parameters	RX	TX
1	中心频率(Center Frequency)	510MHz	590MHz
2	通带频率(Pass Band Frequency)	500~520MHz	580~600MHz
3	插入损耗(Insertion Loss)	≤1.5dB	≤1.5dB
4	回波损耗(Return Loss)	≥18dB	≥18dB
5	带外抑制(Rejection)	≥65dB @ 580~600MHz	≥65dB @ 500~520MHz
6	功率(Power)	≤20W	
7	表面处理(Surface Finish)	黑色烤漆(Black Paint)	
8	接口形式(Connectors)	SMA-Female	
9	端口标识(Port Sign)	Port1:ANT ; Port2:RX ; Port3:TX	
10	净重(Net Weight)	0.815 KG	
11	外形结构图(Configuration)	As Below (Size Unit: mm)	

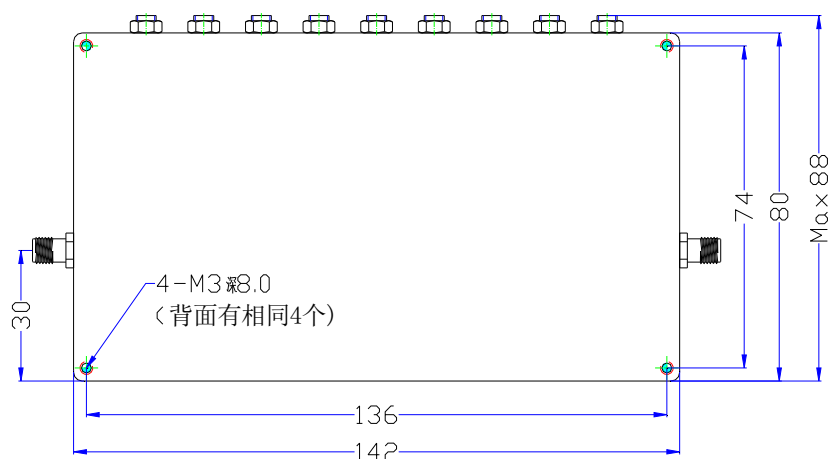

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

<http://www.cdweitong.com> E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页