


WT-B0247-02

Cavity Duplexer

Specifications

Serial	Parameters	RX	TX
1	Center Frequency (F0)	751MHz	782MHz
2	Pass Band Frequency	746~756MHz	777~787MHz
3	Pass Band Insertion Loss	≤1.0dB	≤1.0dB
4	Pass Band Ripple	≤0.3dB	≤0.3dB
5	Pass Band VSWR	≤1.3:1	≤1.3:1
6	Stop Band Attenuation	≥70dB @ 777~787MHz	≥70dB @ 746~756MHz
7	Impedance	50 ohms	
8	Power Handling	≤10W	
9	Connectors	SMA-Female	
10	Operating Temperature	-40°C ~ +70°C	
11	Surface Finish	Black Paint	
12	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
13	Net weight	0.755 KG	
14	Configuration	As Below (Size Unit: mm)	

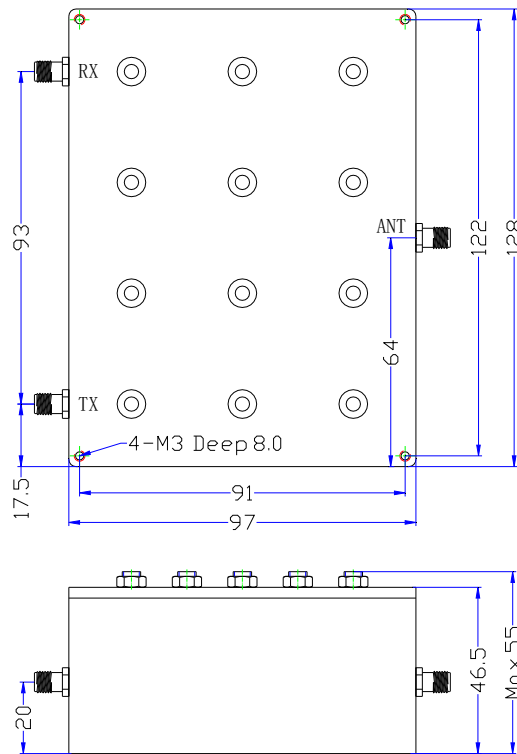

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051