


# WT-B0259-02

## 腔体双工器

### 技术指标

Serial	Parameters	RX	TX
1	中心频率(Center Frequency)	361MHz	369MHz
2	带宽(Bandwidth)	2MHz (360~362MHz)	2MHz (368~370MHz)
3	插入损耗(Insertion Loss)	≤1.5dB	≤1.5dB
4	驻波比(VSWR)	≤1.3:1	≤1.3:1
5	带外抑制(Rejection)	≥35dB @ 368~370MHz	≥35dB @ 360~362MHz
6	阻抗(Impedance)	50 ohms	
7	功率(Power)	≤20W	
8	接口形式(Connectors)	SMA-Female	
9	表面处理(Surface Finish)	黑色烤漆(Black Paint)	
10	端口标识(Port Sign)	Port1:ANT ; Port2:RX ; Port3:TX	
11	净重(Net Weight)	1.27 KG	
12	外形结构图(Configuration)	As Below (Size Unit: mm)	

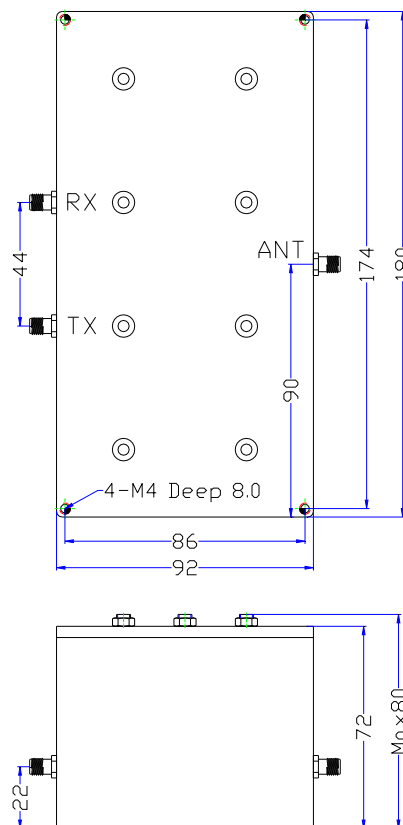

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332 FAX:+86-28-84300332-807

地址:中国 成都市成华区建材路 37 号 1-1108 610051

ADD: 11F-1108, Building#1, NO.37, Jiancai Road, Chengdu 610051, China. Zip Code:610051

第4页 共4页