


# WT-B0270-02

## Cavity Duplexer

### Specifications

Serial	Parameters	RX	TX
1	Center Frequency (F0)	402MHz	467MHz
2	Pass Band Frequency	399~405MHz	464~470MHz
3	Pass Bands Insertion Loss	≤0.5dB	≤0.5dB
4	Pass Bands Ripple	≤0.2dB	≤0.2dB
5	Pass Bands Return Loss	≥20dB	≥20dB
6	Stop Band Rejection	≥60dB @ 464~470MHz	≥60dB @ 399~405MHz
7	Impedance	50 ohms	
8	Power Handling	≤30W	
9	Connectors	N-Female	
10	Surface Finish	Black Paint	
11	Port Sign	Port1: ANT ; Port2: RX ; Port3: TX	
12	Net weight	1.235 KG	
13	Configuration	As Below (Size Unit: mm)	

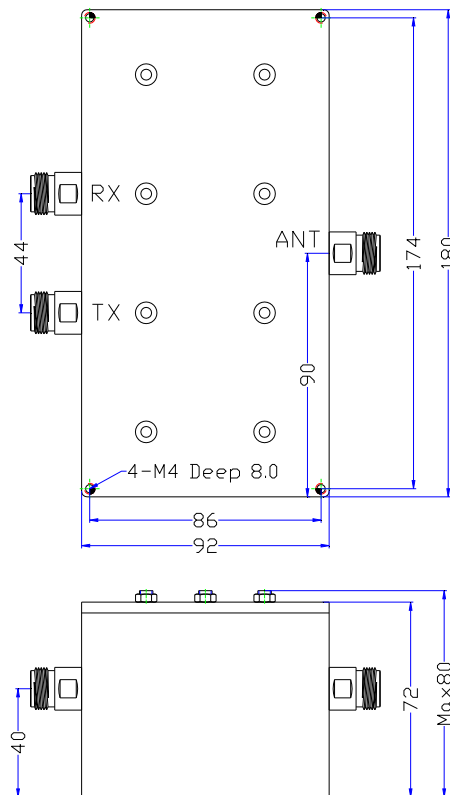

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051