


WT-B0290-02

Cavity Diplexer

Specifications

Serial	Parameters	CH1	CH2
1	Center Frequency (F0)	2025MHz	2300MHz
2	Pass Band Frequency	1950~2100MHz	2200~2400MHz
3	Pass Band Insertion Loss	≤1.2dB	≤1.2dB
4	Pass Band Return Loss	≥18dB	≥18dB
5	Stop Band Rejection	≥50dB @ 2200~2400MHz	≥50dB @ 1950~2100MHz
6	Impedance	50 ohms	
7	Power Handling	≤20W	
8	Connectors	SMA-Female	
9	Operating Temperature	-40°C ~ +70°C	
10	Surface Finish	Black Paint	
11	Port Sign	Port1:ANT ; Port2:CH1 ; Port3:CH2	
12	Net weight	0.435 KG	
13	Configuration	As Below (Size Unit: mm)	

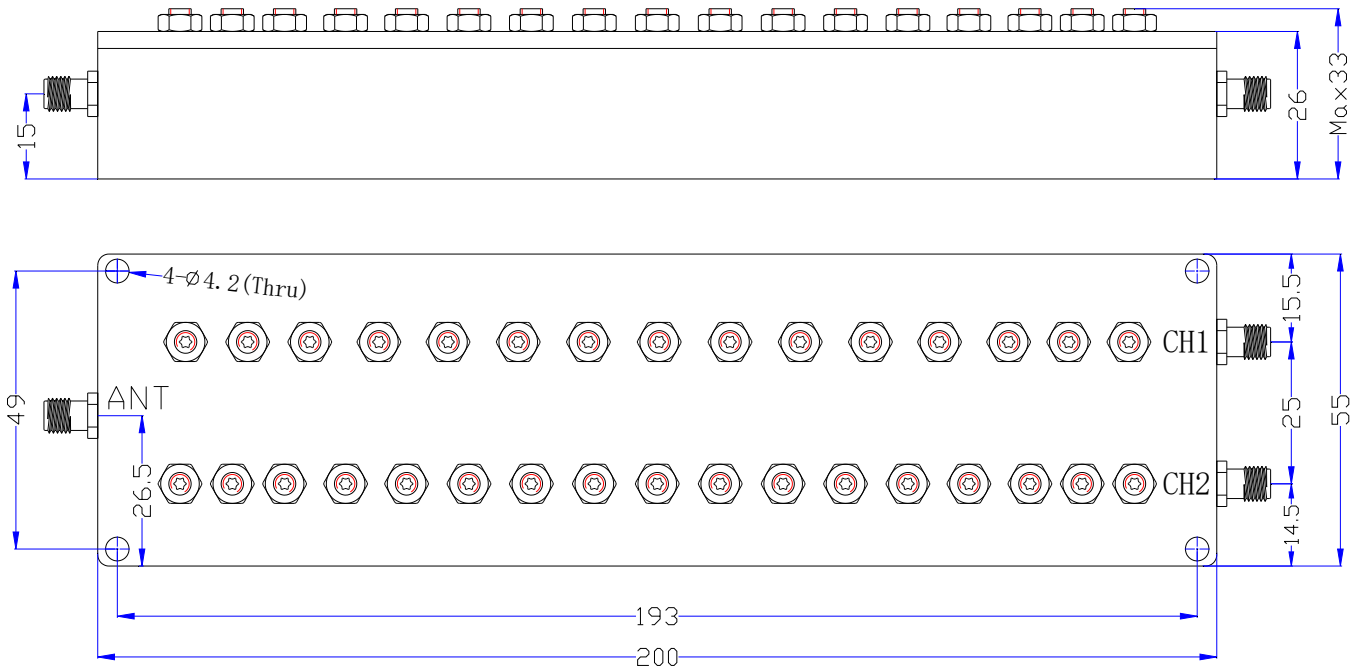

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051