


WT-B0330-02

Cavity Diplexer

Specifications

Serial	Parameters	RX	TX
1	Center Frequency (F0)	382.5MHz	392.5MHz
2	Pass Band Frequency	380~385MHz	390~395MHz
3	Pass Band Insertion Loss	≤1.8dB	≤1.8dB
4	Pass Band VSWR	≤1.3:1	≤1.3:1
5	Stop Band Rejection	≥60dB @ 390~395MHz	≥60dB @ 380~385MHz
6	Impedance	50 ohms	
7	Power Handling	ANT:25W max. ; RX&TX: 25W max.	
8	Surface Finish	Black Paint	
9	Connectors	SMA-Female	
10	Operating Temperature	-30°C ~+70°C	
11	Port Sign	Port1:ANT ; Port2:RX ; Port3:TX	
12	Net weight	1.7 KG	
13	Configuration	As Below (Size Unit: mm)	

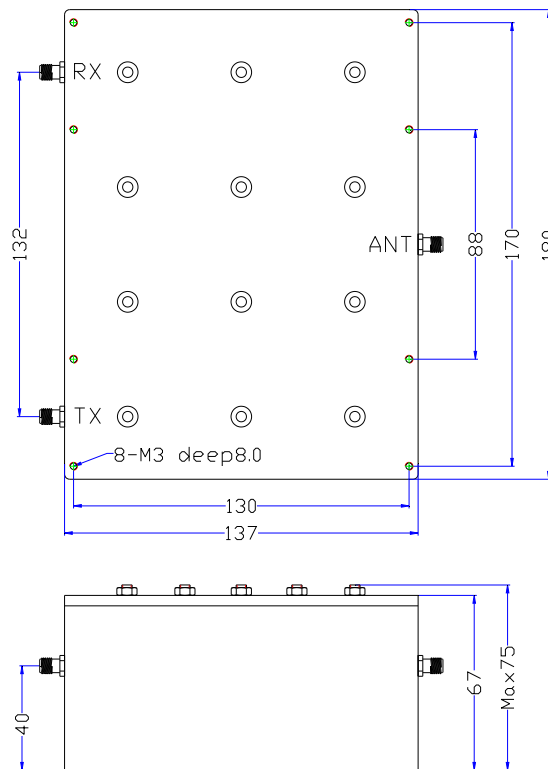

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051