WT-E0010-10dB

10dB Directional Coupler

Specifications
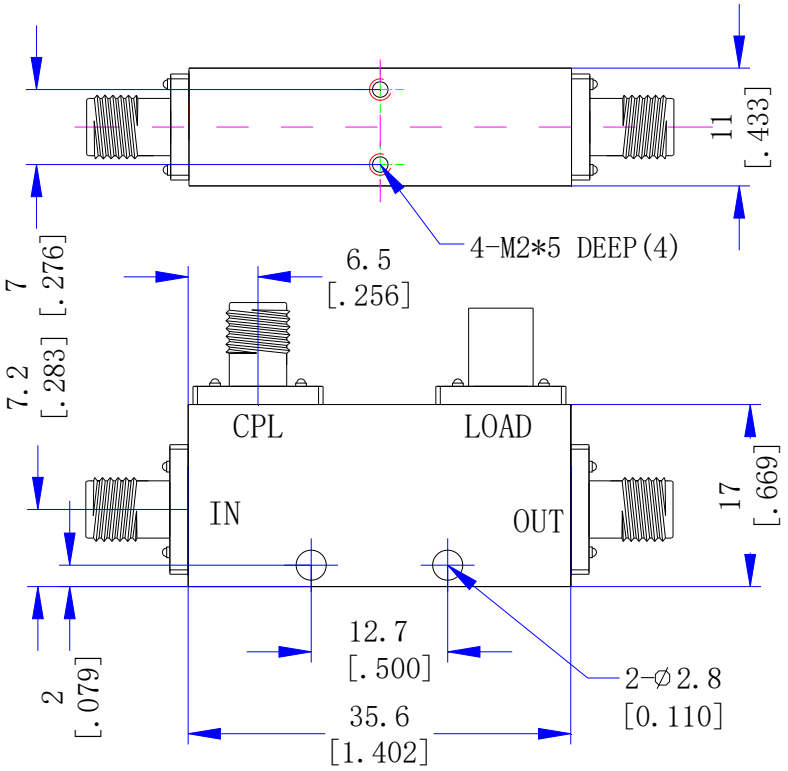
Serial	Parameters	
1	Coupling	10±1dB
2	Frequency Range	6～18GHz
3	Frequency Sensitivity	≤±1.0dB
4	Insertion Loss	≤1.0dB
5	Directivity	≥12dB
6	VSWR	≤1.5:1
7	Power Handling	50W
8	Surface Finish	Black Paint
9	Connectors	SMA-Female
10	Net Weight	TBD
11	Configuration	As Below (Size Unit: mm)