WT-E0011-H3dB

3dB Hybrid Coupler

Specifications
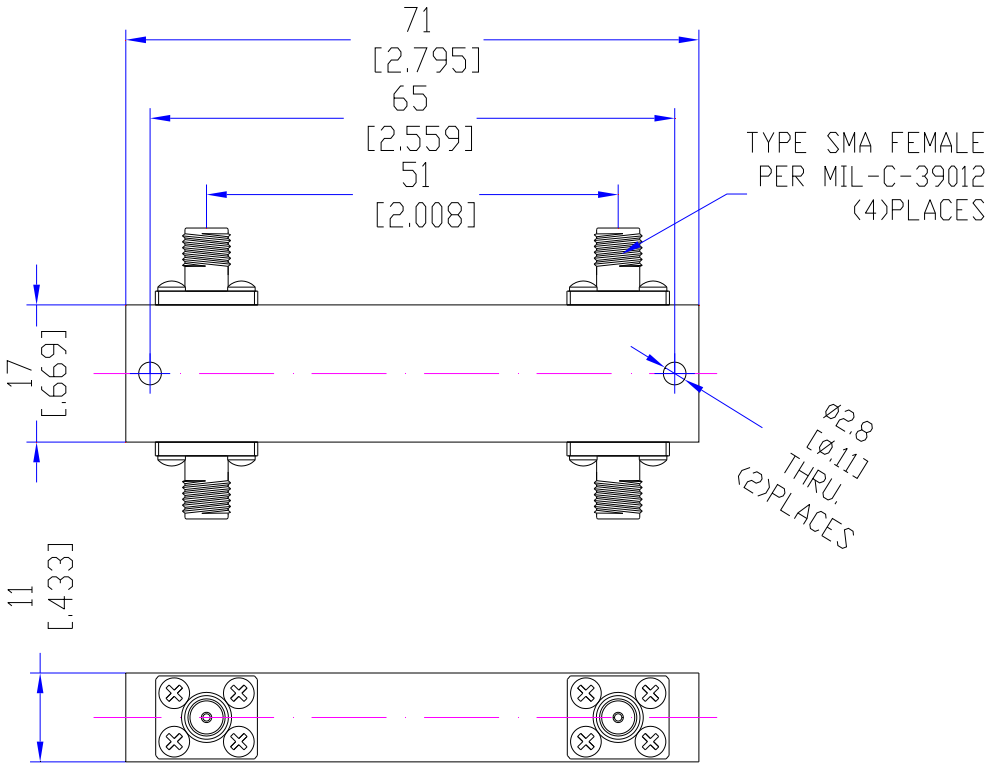
Serial	Parameters	
1	Frequency Range	0.5～1GHz
2	Nominal Split	3.1dB
3	Insertion Loss	≤0.3dB
4	VSWR	≤1.2:1
5	Amplitude Balance	≤±0.5dB
6	Phase Balance	≤±2°
7	Isolation	≥22dB
8	Power Handling	Average≤50W (Peak ≤3KW)
9	Connectors	SMA-Female
10	Surface Finish	Black Paint
11	Configuration	As Below (Size Unit: mm)