WT-E0018-30dB

30dB Directional Coupler

Specifications
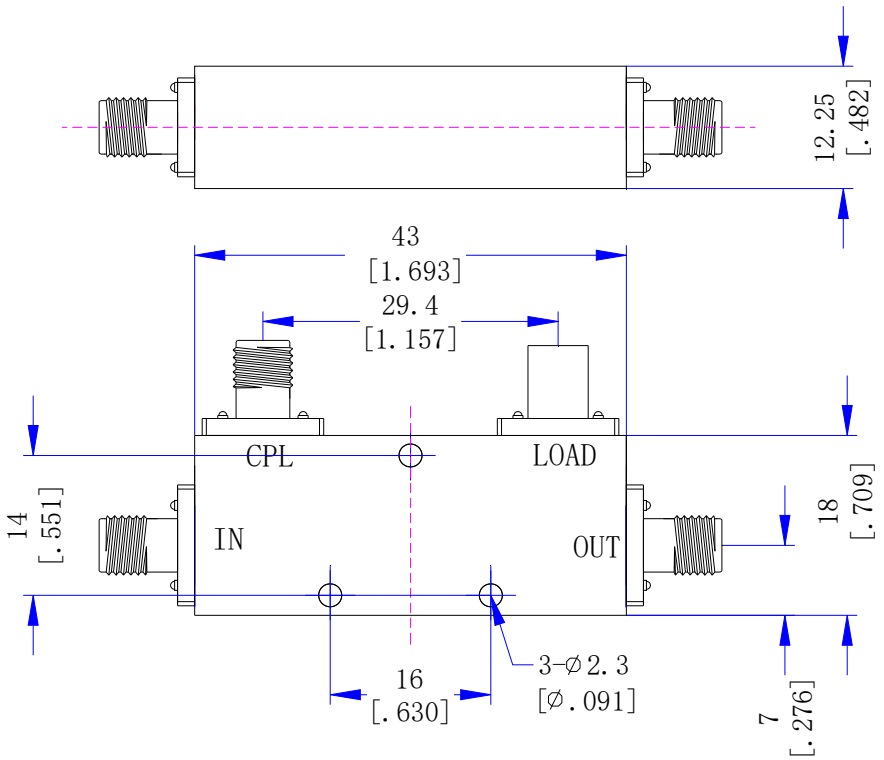
Serial	Parameters	
1	Frequency Range	2～8GHz
2	Coupling	30±1.0dB
3	Directivity	≥17dB
4	Insertion Loss	≤0.4dB(Contain coupling losses)
5	VSWR	≤1.35:1
6	Frequency Sensitivity	≤±0.5dB
7	Power Handling	20W
8	Impedance	50 Ohms
9	Port Connectors	SMA-Female
10	Surface Finish	Black Paint
11	Operating Temperature	-40℃～+70℃
12	Storage Temperature	-55℃～+85℃
13	Configuration	As Below (Size Unit: mm)