WT-E0074-30dB

30dB Directional Coupler

Specifications
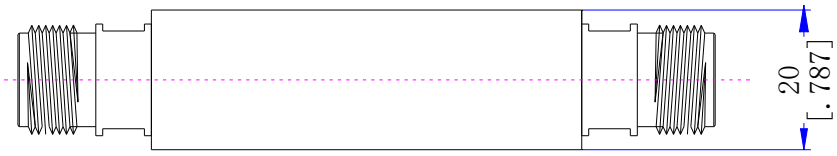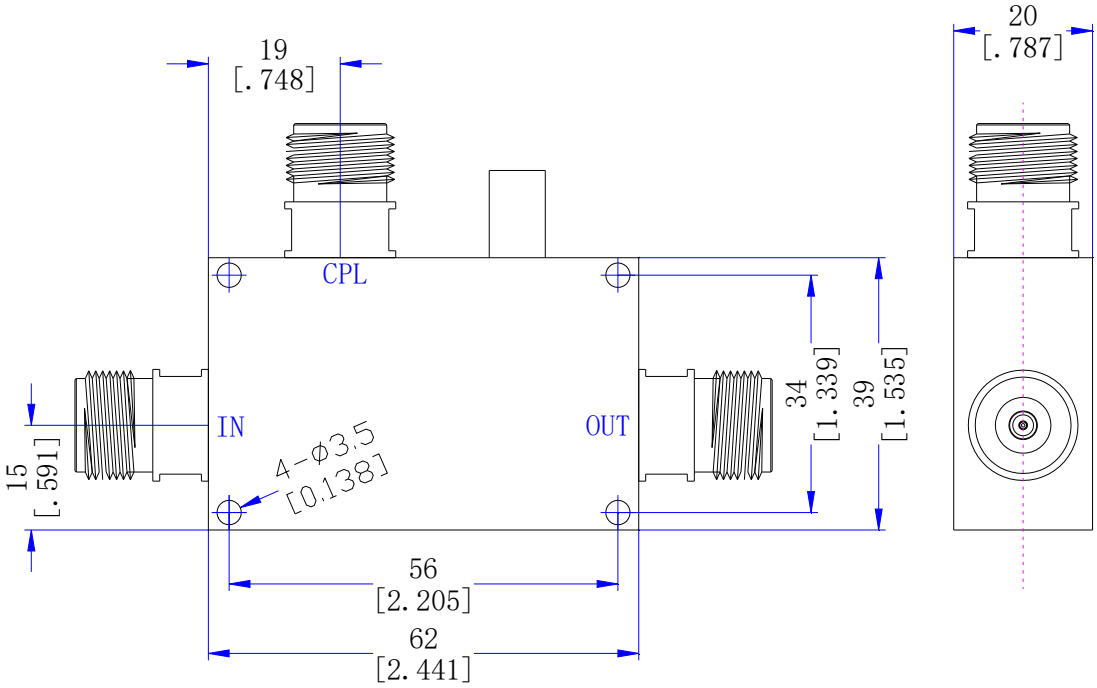
Serial	Parameters	
1	Coupling	30±1.2dB
2	Frequency Range	2.0～2.7GHz
3	Amplitude Flatness	±1.0dB
4	Insertion Loss	≤0.25dB (Excluding coupled power)
5	Directivity	≥20dB
6	VSWR	≤1.3:1
7	Power Handling	Average ≤300Watt ; Peak ≤3KW
8	Impedance	50 Ohms
9	Working Temperature	-30℃～+70℃
10	Surface Finish	Gush Arenaceous Guide Oxygen
11	Connectors	N-Female
12	Configuration	As Below (Size Unit: mm[inch])