WT-E0090-30dB

30dB Directional Coupler

Specifications
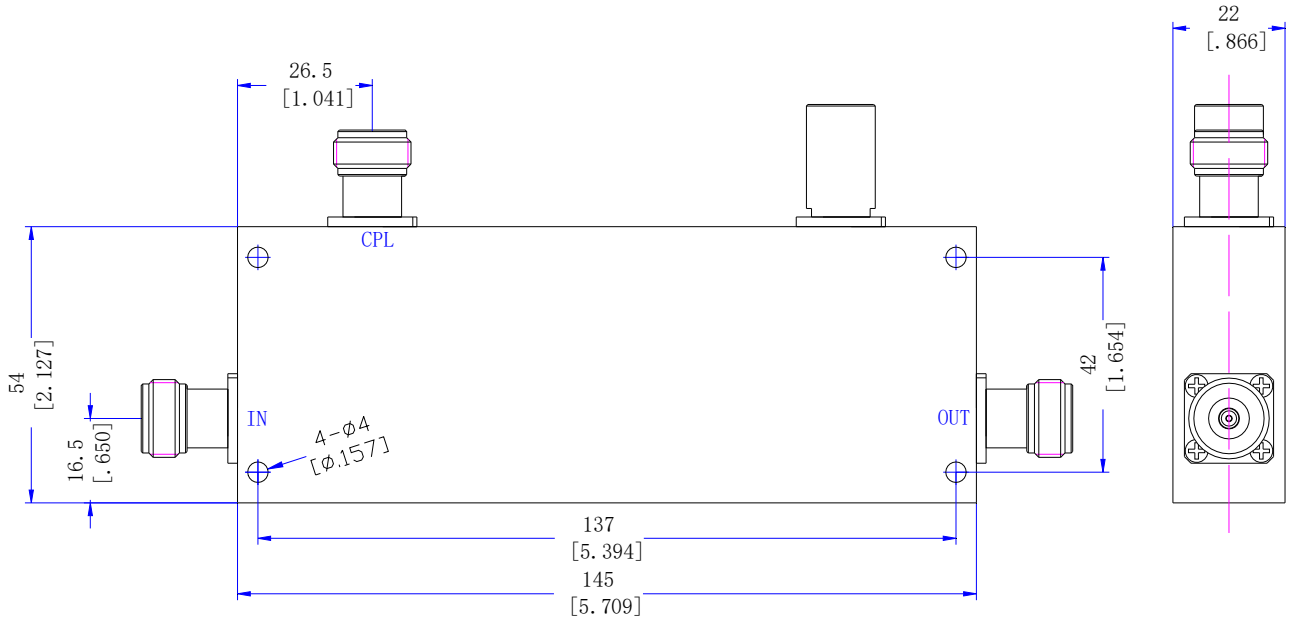
Serial	Parameters	
1	Coupling	30±1.0dB
2	Frequency Range	1500～4000MHz
3	Insertion Loss	≤0.3dB (Excluding coupled power)
4	Frequency Sensitivity	≤±1.0dB
5	VSWR	≤1.30:1
6	Directivity	≥17dB
7	Power Handling	Average Power: ≤200W Peak Power: ≤1KW
8	Impedance	50 Ohms
9	Surface Finish	Black Paint
10	Connectors	N-Female
11	Net Weight	0.54 KG
12	Configuration	As Below (Size Unit: mm[inch])