


WT-E0094-6dB

6dB Directional Coupler

Specifications

Serial	Parameters	
1	Coupling	$6 \pm 0.7\text{dB}$
2	Frequency Range	2~18GHz
3	Insertion Loss	$\leq 0.74\text{dB}$ (Excluding coupling losses 1.26dB)
4	Frequency Sensitivity	$\leq \pm 0.7\text{dB}$
5	VSWR	$\leq 1.5:1$
6	Directivity	$\geq 15\text{dB}$
7	Power Handling	$\leq 20\text{W}$
8	Impedance	50 Ohms
9	Surface Finish	Black Paint
10	Connectors	SMA-Female
11	Net weight	0.035 KG
12	Configuration	As Below (Size Unit: mm[inch])

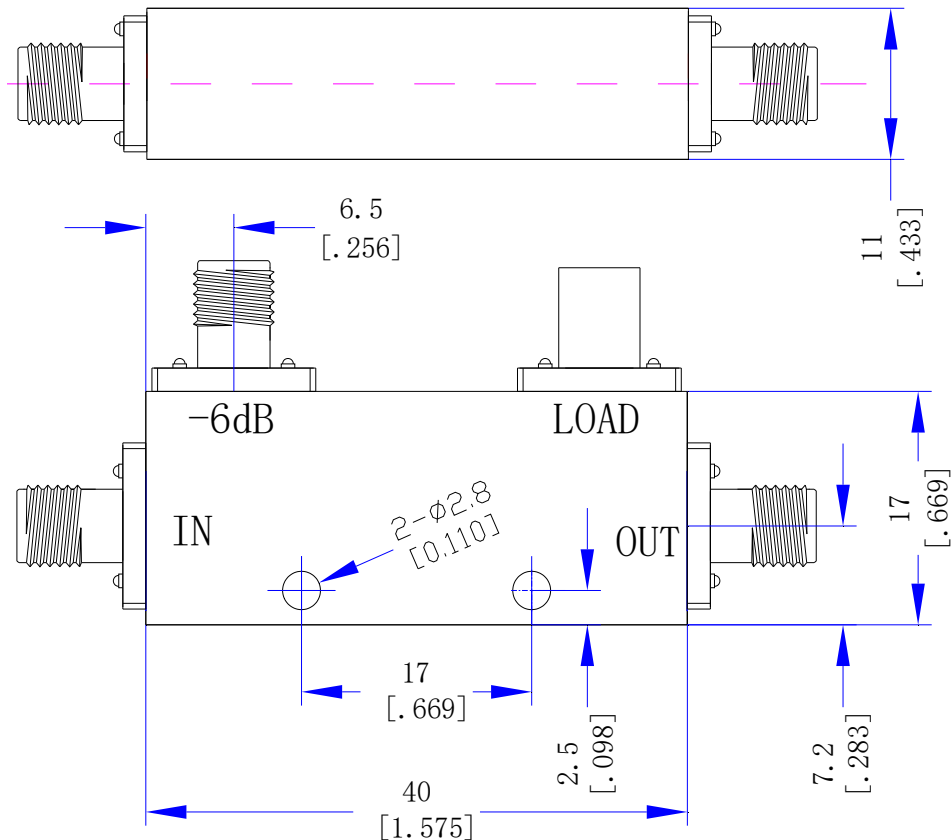

WT Microwave INC.

http://www.wtmicrowave.com E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

http://www.cdweitong.com E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051