WT-E0099-15dB

15dB Directional Coupler

Specifications
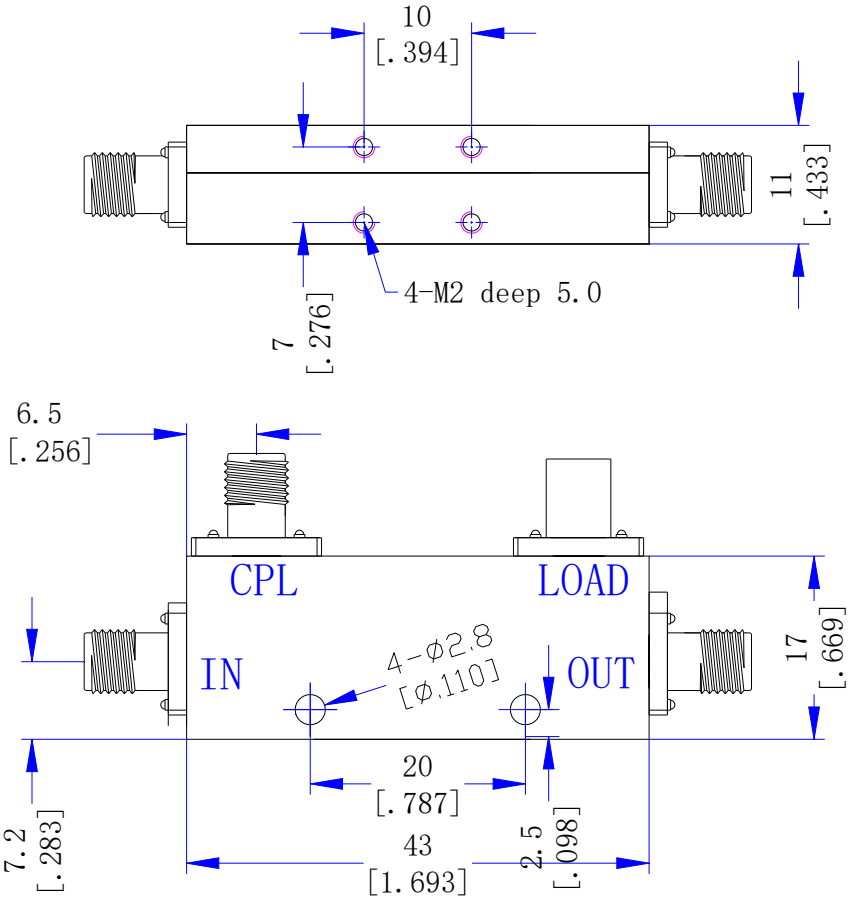
Serial	Parameters	
1	Coupling	15±1.0dB
2	Frequency Range	9～11GHz
3	Insertion Loss	≤0.7dB (Excluding coupling losses 0.14dB)
4	Frequency Sensitivity	≤±0.7dB
5	VSWR	≤1.4:1
6	Directivity	≥15dB
7	Power Handling	≤30W
8	Impedance	50 Ohms
9	Surface Finish	Black Paint
10	Connectors	SMA-Female
11	Net weight	0.035 KG
12	Configuration	As Below (Size Unit: mm[inch])