


WT-E0153-6dB

6dB Directional Coupler

Specifications

Serial	Parameters	
1	Coupling	$6 \pm 0.7\text{dB}$
2	Frequency Range	10~15GHz
3	Frequency flatness	$\leq \pm 0.6\text{dB}$
4	Insertion Loss	$\leq 0.7\text{dB}$ (Excluding coupled power)
5	Directivity	$\geq 15\text{dB}$
6	VSWR	$\leq 1.4:1$
7	Power Handling	$\leq 20\text{W}$
8	Impedance	50 Ohms
9	Surface Finish	Guided Oxygen or Black Paint
10	Connectors	IN: SMA-Male, Other: SMA-Female
11	Working Temperature	$-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
12	Net Weight	0.035 KG
13	Configuration	As Below (Size Unit: mm[inch])

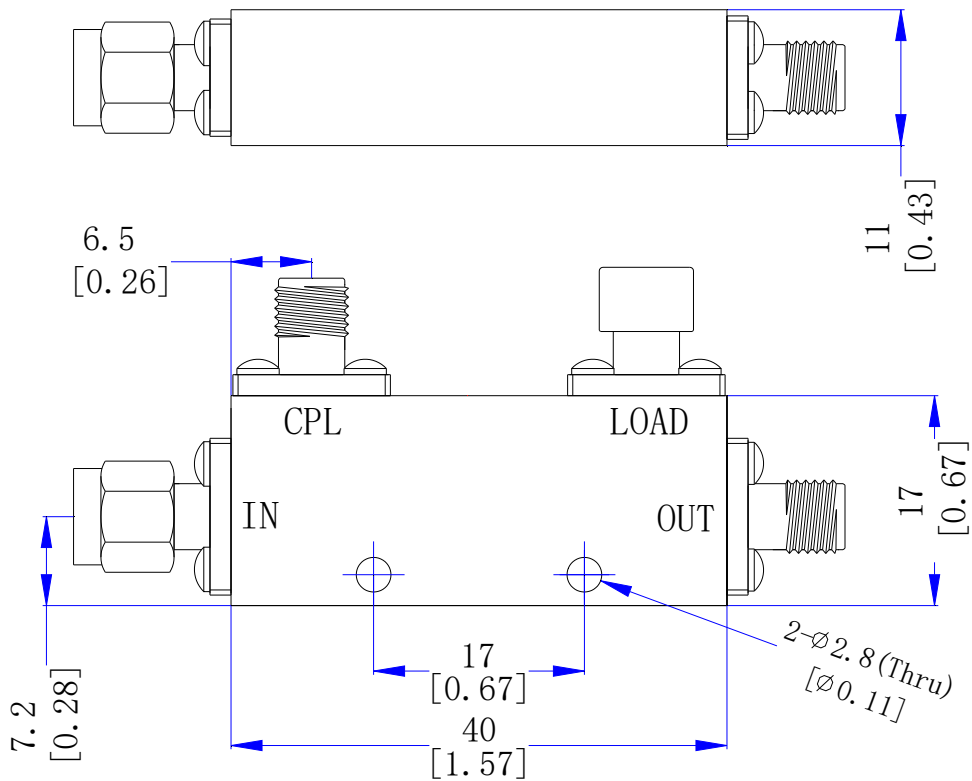

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051