


WT-D0503-16

16 Way Resistive Power Divider

Specifications

Serial	Parameters	
1	Way	16
2	Frequency Range	DC~6.0GHz
3	Insertion Loss	$\leq 24 \pm 2.0\text{dB}$
4	VSWR	$\leq 1.3:1$
5	Power Handling	Forward $\leq 1\text{Watt}$; Reversed $\leq 0.1\text{Watt}$
6	Impedance	50 ohms
7	Connectors	SMA-Female
8	Surface Finish	Gush Arenaceous Guide Oxygen
9	Temperature Range	$-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
10	Net Weight	TBD
11	Configuration	As Below (Size Unit: mm[inch])

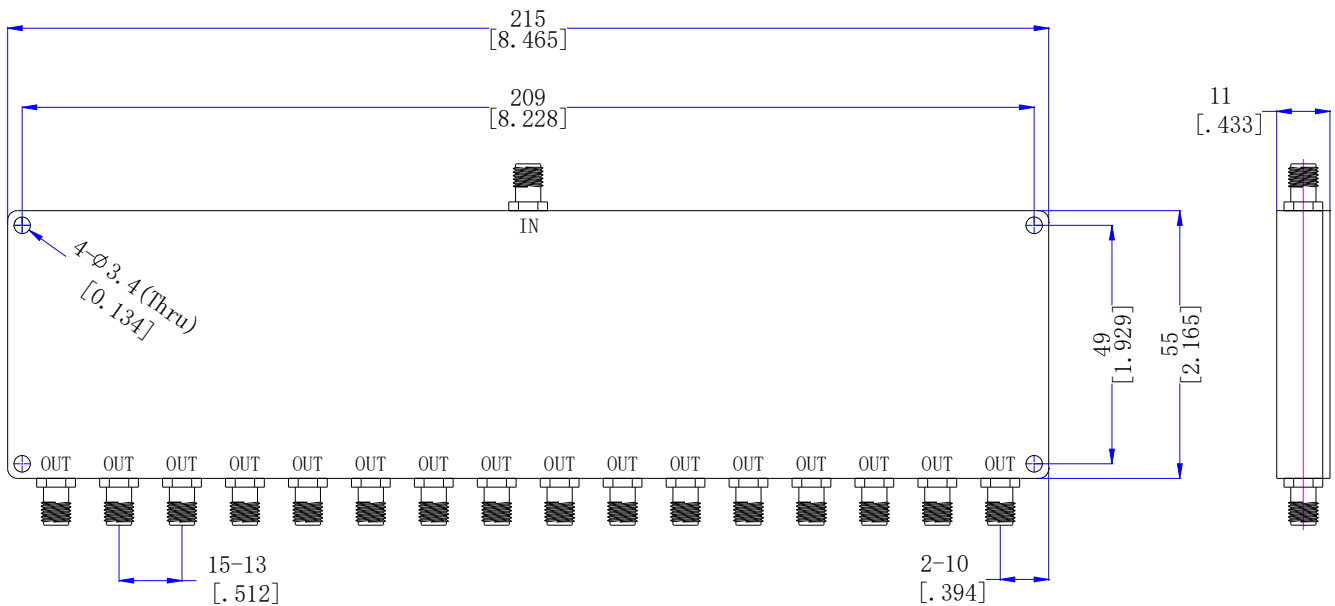

WT Microwave INC.

<http://www.wtmicrowave.com> E-mail: tech@wtmicrowave.com sales@wtmicrowave.com

<http://www.cdweitong.com> E-mail: tech@cdweitong.com sales@cdweitong.com

TEL:+86-28-84300332/84300037 FAX:+86-28-84300332-807

Add: Chengdu of China Zip Code:610051