WT-A0050-B04

Waveguide Band Pass Filter

Specifications
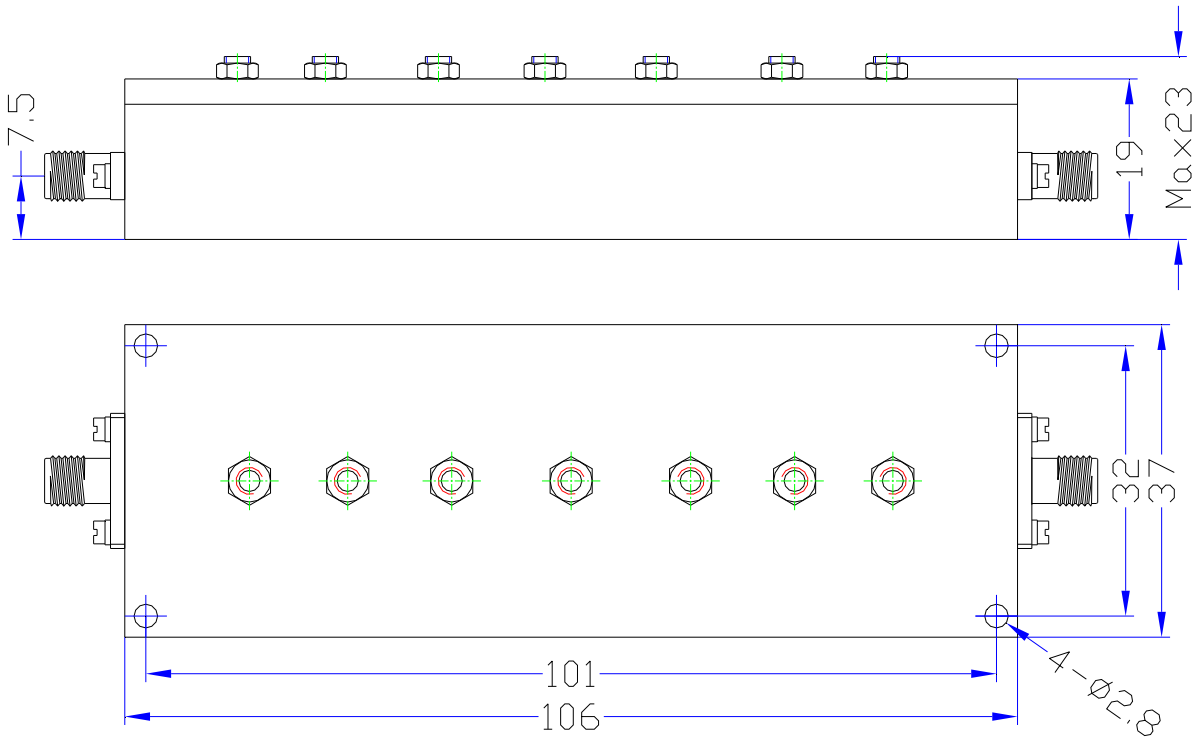
Serial	Parameters	
1	Center Frequency (F0)	8317MHz
2	Pass Band Bandwidth	28MHz (8303～8331MHz)
3	Insertion Loss	≤1.2dB@8303～8331MHz
4	Pass Band VSWR	≤1.3@8303～8331MHz
5	Stop Band Rejection	≥80dB@F0±500MHz (7817MHz，8817MHz)
6	Impedance	50 ohms
7	Power Handling	10W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	+10℃～+40℃
11	Net Weight	TBD
12	Configuration	As Below