


WT-A0101-Q06

腔体滤波器

技术指标

Serial	Parameters	
1	Frequency Range	2350~2400MHz, F0=2375MHz
2	Insertion Loss	≤1.0dB
3	VSWR	≤1.4
4	Rejection	≥60dB@ DC~2250MHz ≥60dB@ 2500~3000MHz
5	Power Handling	33dBm (2W)
6	Surface Finish	Black Paint
7	Connectors	SMA-Female
8	Configuration	As Below

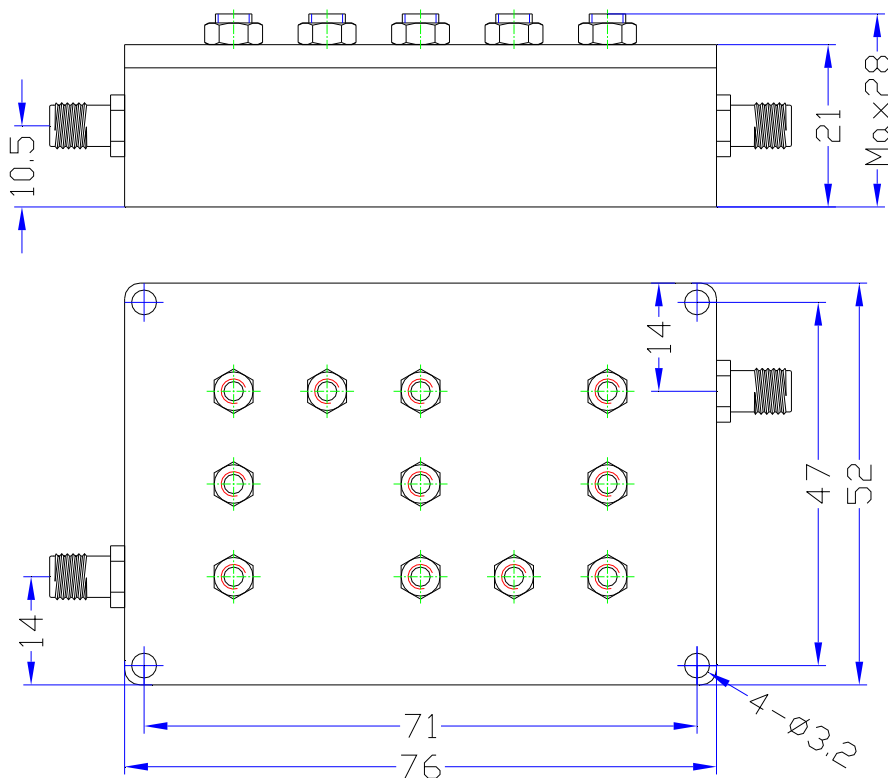

成都微通科技有限公司

Chengdu Microwave Communication Technology CO.,Ltd

http://www.cdweitong.com E-mail:tech@cdweitong.com sales@cdweitong.com

TEL:+86-028-84300332 FAX:+86-028-84300332

地址:中国 成都市建设路 43 号 610051

Add:No.43,Jianshe Road,Chengdu.China Zip Code:610051

第4页 共4页